


## Zertifizierungsreport

T-Systems-DSZ-ITSEC-04084-2002

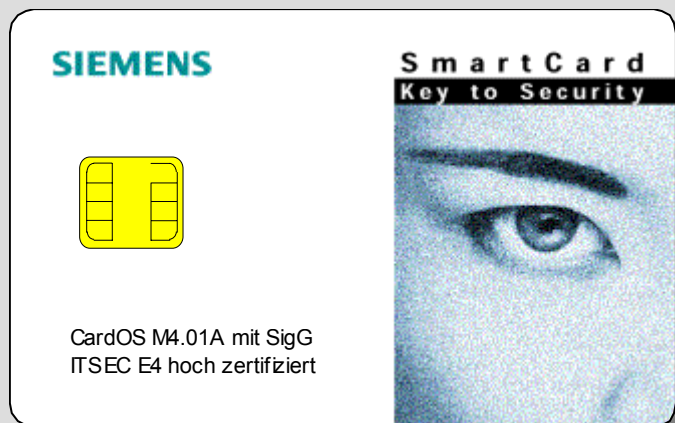

CardOS/M4.01A mit  
Applikation für digitale  
Signatur

Siemens AG

Zertifizierungsreport T-Systems-DSZ-ITSEC-04084-2002, Version 1.0, 24.09.2002

Für den Zertifizierungsreport: © T-Systems ISS GmbH, 2002

Für die Sicherheitsvorgaben: © Siemens AG

Die Vervielfältigung ist nur gestattet, wenn der Report vollständig wiedergegeben wird.

Für weitere Auskünfte und Kopien dieses Reports ist die Zertifizierungsstelle wie folgt erreichbar:



T-Systems ISS GmbH, - Zertifizierungsstelle -, Rabinstr.8, 53111 Bonn



0228/9841-0, Fax: 0228/9841-60



[www.t-systems-zert.com](http://www.t-systems-zert.com)



## Deutsches IT-Sicherheitszertifikat

anerkannt vom  
Bundesamt für Sicherheit in der Informationstechnik

T · · Systems · · ·

Die Zertifizierungsstelle  
der T-Systems ISS GmbH

bestätigt hiermit, daß

### **CardOS/M4.01A mit Applikation für digitale Signatur**

der

#### **Siemens AG**

ICN EN TNA, Charles-de-Gaulle Strasse 2-4, 81737 München

nach den Kriterien für die Bewertung der Sicherheit von Systemen der Informationstechnik (ITSEC) und dem Handbuch für die Bewertung der Sicherheit von Systemen der Informationstechnik (ITSEM) gegen spezifische Sicherheitsvorgaben evaluiert wurde und folgendes Prüfergebnis erzielte:

Sicherheitsfunktionen:	Identifikation und Authentisierung, Zugriffskontrolle, Protokollauswertung, Wiederaufbereitung, Übertragungssicherung
Vertrauenswürdigkeitsstufe:	<b>E4</b>
Mindeststärke der Sicherheitsmechanismen:	<b>hoch</b>

Dieses Zertifikat erfüllt die Bedingungen der Vereinbarung über die gegenseitige Anerkennung von Sicherheitszertifikaten in der Informationstechnik (SOGIS-MRA) vom 03.03.1998 zwischen Deutschland, Finnland, Frankreich, Griechenland, Großbritannien, Italien, Niederlande, Norwegen, Portugal, Schweden, Schweiz und Spanien.

Dieses Zertifikat gilt nur in Verbindung mit dem vollständigen Zertifizierungsreport zur unten angegebenen Registriernummer und für die darin aufgeführten Konfigurationen und Einsatzumgebungen. Die Empfehlungen und Hinweise im Zertifizierungsreport sind zu beachten. Die Sicherheitsvorgaben, die Basis der Evaluierung waren, sind im Zertifizierungsreport aufgeführt. Die Bewertung der Stärke der zur Ver- und Entschlüsselung geeigneten kryptographischen Mechanismen ist von der Anerkennung durch das BSI ausgenommen. Kopien des Zertifikats und des Zertifizierungsreports sind beim Auftraggeber und bei der Zertifizierungsstelle erhältlich.

Registrierungsnummer: Bonn, den 24.09.2002

T-Systems-

DSZ-ITSEC-04084-2002


Dr. Heinrich Kersten  
Leiter der Zertifizierungstelle

T · · Systems · · ·

(Diese Seite ist beabsichtigterweise leer.)

## Inhaltsverzeichnis

Titelblatt .....	1
Copyright .....	2
Zertifikat .....	3
Inhaltsverzeichnis .....	5
Abkürzungen .....	6
Referenzen .....	7
Glossar .....	8
Erläuterungen zu den Sicherheitskriterien.....	11
Antragsteller und Evaluationsgegenstand .....	15
Maßgebende Prüfgrundlagen .....	15
Evaluierung.....	16
Zertifizierung.....	16
Zusammenfassung der Ergebnisse.....	18
Anwendung der Ergebnisse .....	21
Anhang.	
Sicherheitsvorgaben (Security Target) zu „CardOS/M4.01A mit Applikation für digitale Signatur“.	




## Abkürzungen

AIS	Anwendungshinweise und Interpretationen zum Schema (Verfahren des BSI)
BGBI	Bundesgesetzblatt
BS	British Standard
BSI	Bundesamt für Sicherheit in der Informationstechnik
CC	Common Criteria for Information Technology Security Evaluation
CEM	Common Methodology for Information Technology Security Evaluation
DAR	Deutscher Akkreditierungsrat
DATech	Deutsche Akkreditierungsstelle Technik e.V.
DIN	Deutsches Institut für Normung e.V.
ETR	Evaluation Technical Report (Evaluierungsbericht)
EVG	Evaluationsgegenstand
ISO	International Organization for Standardization
IT	Informationstechnik
ITSEC	Information Technology Security Evaluation Criteria (ITSEC)
ITSEF	IT Security Evaluation Facility: Prüflabor
ITSEM	Information Technology Security Evaluation Manual (ITSEM)
JIL	Joint Interpretation Library
RegTP	Regulierungsbehörde für Telekommunikation und Post
SigG	Signaturgesetz
SigV	Signaturverordnung

## Referenzen

- /AIS/ Anwendungshinweise und Interpretationen zum Schema, Bundesamt für Sicherheit in der Informationstechnik, gültige Fassung
- /ALG/ Geeignete Kryptoalgorithmen, veröffentlicht im Bundesanzeiger durch die Regulierungsbehörde für Telekommunikation und Post, gültige Fassung
- /BS7799/ BS 7799-1:2000 Information technology - Code of practice for information security management  
BS7799-2:1999 Specification for information security management systems
- /CC/ Common Criteria: Gemeinsame Kriterien für die Prüfung und Bewertung der Sicherheit von Informationstechnik (ISO 15408) , August 1999  
Teil 1: Einführung und allgemeines Modell,  
Teil 2: Funktionale Sicherheitsanforderungen,  
Teil 3: Anforderungen an die Vertrauenswürdigkeit
- /CEM/ Common Methodology for Information Technology Security Evaluation,  
Part 1: Introduction and general model, Version 0.6, January 1997  
Part 2: Evaluation Methodology, Version 1.0, August 1999
- /EU-DIR/ Richtlinie 1999/93/EG des Europäischen Parlaments und des Rates vom 13.Dezember 1999 über gemeinschaftliche Rahmenbedingungen für elektronische Signaturen
- /ITSEC/ Kriterien für die Bewertung der Sicherheit von Systemen der Informationstechnik (ITSEC), Version 1.2 (1991), Bundesanzeiger-Verlag Köln, ISBN 92-826-3003-X
- /ITSEM/ Handbuch für die Bewertung der Sicherheit von Systemen der Informationstechnik (ITSEM), Version 1.0 (1993), Bundesanzeiger Verlag Köln, ISBN 92-826-7078-2
- /JIL/ Joint Interpretation Library, Version 2.0, Nov. 1998
- /SigG/ Gesetz über Rahmenbedingungen für elektronische Signaturen und zur Änderung weiterer Vorschriften (Signaturgesetz – SigG) vom 16.05.2001 (BGBl. I, S. 876 ff.)
- /SigV/ Verordnung zur elektronischen Signatur (Signaturverordnung – SigV) vom 16.11.2001 (BGBl. I., S. 3074 ff.)




## Glossar

Das Glossar erläutert Begriffe aus dem Zertifizierungsschema der T-Systems ISS GmbH, erhebt allerdings keinerlei Anspruch auf Vollständigkeit oder Allgemeingültigkeit. Der Begriff *Sicherheit* meint hier stets Sicherheit im Kontext der Informationstechnik.

Akkreditierung	Von einem Akkreditierungsgeber durchgeführtes Verfahren zum Nachweis, daß eine Prüfstelle [bzw. Zertifizierungsstelle] den Anforderungen der maßgebenden Norm ISO 17025 [bzw. DIN EN 45011] entspricht.
Audit	Verfahren des Sammelns objektiver Nachweise dafür, daß ein Prozeß so abläuft wie vorgegeben.
Bestätigungsstelle	Stelle, die mit Anerkennung durch die Regulierungsbehörde für Telekommunikation und Post und im Einklang mit SigG und SigV Sicherheitsbestätigungen für technische Komponenten und für die Umsetzung von Sicherheitskonzepten bei Trust Centern (Zertifizierungsdiensteanbietern nach SigG) herausgibt.
Dienstleistung	Hier: Eine von einem Unternehmen angebotene, durch Geschäftsprozesse erbrachte und durch Nutzer in Anspruch nehmbarbare Leistung.
Evaluation Technical Report	Schlußbericht einer Prüfstelle über den Ablauf und die Ergebnisse einer Evaluation.
Evaluationsgegenstand	Ein IT-Produkt oder IT-System, das in Verbindung mit seinen (Adminstrations- und Benützer-) Handbüchern Gegenstand einer Evaluierung ist.
Evaluationsstufe	Stufe der Vertrauenswürdigkeit, die aus einer Evaluierung gewonnen wird; Element eines Bewertungssystems in Sicherheitskriterien ITSEC / CC; Höhe des Vertrauens, daß der EVG seine Sicherheitsvorgaben erfüllt.
Evaluator	Prüfer/in in einer Prüfstelle.
Evaluierung	Prüfung eines IT-Produktes, IT-Systems oder einer IT-Dienstleistung auf der Basis von IT-Sicherheitskriterien.
Integrität	Klassisches Sicherheitsziel: Daten sollen nur von Befugten geändert werden können.
IT-Dienstleistung	Dienstleistung, die sich bei ihrer Erbringung auf IT-Systeme abstützt.



IT-Produkt	Software und / oder Hardware, die bei einem Anbieter (Hersteller, Vertreiber) erworben werden kann.
IT-Sicherheitsmanagement	Ein Unternehmensprozeß, dessen Ziel die Einrichtung und Aufrechterhaltung der (IT-)Sicherheit in einem Unternehmen ist.
IT-System	Eine in sich funktionsfähige Kombination von IT-Produkten. (ITSEC:) Eine reale Installation von IT-Produkten mit einer bekannten Einsatzumgebung.
Lizenzvereinbarung	Vereinbarung zwischen einer Prüfstelle und einer Zertifizierungsstelle – den Ablauf und die Verantwortlichkeiten bei einer Evaluierung und Zertifizierung betreffend.
Meilensteinplan	Projekt- / Terminplan für die Durchführung einer Evaluierung und Zertifizierung
Problembereich	Bericht einer Prüfstelle an die Zertifizierungsstelle über besondere Probleme bei einer Evaluierung, z.B. die Interpretation der Sicherheitskriterien betreffend.
Produkt-Zertifizierung	Zertifizierung von IT-Produkten.
Prozeß	Abfolge vernetzter Tätigkeiten (Prozeßelemente) in einer gegebenen Prozeßumgebung – mit dem Gesamtziel, eine bestimmte Dienstleistung zu erbringen.
Prüfbegleitung	Verfahren der Zertifizierungsstelle, um die Ordnungsmäßigkeit (Kriterienkonformität, einheitliche Vorgehensweise und Bewertungen, etc.) einer Evaluierung zu überprüfen.
Prüfstelle	Stelle, die Evaluierungen durchführt (ITSEF).
Re-Zertifizierung	Nach Änderungen am zertifizierten Objekt notwendig werdende Zertifizierung der geänderten Version; kann auch bei Wechsel von Werkzeugen, Produktions- und Auslieferungsprozessen, Sicherheitskriterien erforderlich werden.
Sicherheitsbestätigung	SigG: Eine Bescheinigung, die die Erfüllung von Anforderungen des Signaturgesetzes bestätigt.
Sicherheitsfunktion	Funktionen zur Abwehr bestimmter Bedrohungen.
Sicherheitskriterien	Dokument mit Sicherheitsanforderungen an Produkte, Systeme und / oder Dienstleistungen und / oder deren Evaluierung.
Sicherheitsvorgaben	Dokument, das einen Satz von Sicherheitsanforderungen and Spezifikationen enthält, die als Basis einer Evaluierung eines speziellen EVG dienen.
Sicherheitszertifikat	s. Zertifikat
System-Zertifizierung	Zertifizierung von installierten IT-Systemen.
Trust Center	s. Zertifizierungsdiensteanbieter



Verfügbarkeit	Klassisches Sicherheitsziel: Daten sollen Befugten stets zur Verfügung stehen, d.h. nicht von Unbefugten vorenthalten werden können oder aufgrund technischer Defekte nicht verfügbar sein.
Vertraulichkeit	Klassisches Sicherheitsziel: Daten sollen nur durch Befugte zur Kenntnis genommen werden können.
Zertifikat	Zusammenfassende (Kurz-)Darstellung eines Zertifizierungsergebnisses; wird durch die Zertifizierungsstelle ausgestellt.
Zertifizierer	Mitarbeiter/in einer Zertifizierungsstelle, die eine Zertifizierung durchführt.
Zertifizierung	Unabhängige Bestätigung der Ordnungsmäßigkeit einer Evaluierung. Auch Bezeichnung für das Gesamtverfahren bestehend aus Evaluierung, Prüfbegleitung und Ausstellung von Zertifikaten und Zertifizierungsreports.
Zertifizierungsdiensteanbieter	Stelle, die die Zugehörigkeit von Signaturschlüsseln zu einer Person durch ein (elektronisches) Zertifikat bestätigt - im Signaturgesetz als „Zertifizierungsdiensteanbieter“ bezeichnet.
Zertifizierungsreport	Bericht über Gegenstand, Ablauf und Ergebnis eines Zertifizierungsverfahrens; wird durch die Zertifizierungsstelle ausgestellt.
Zertifizierungsschema	Zusammenfassung aller Grundsätze, Regeln und Verfahren einer Zertifizierungsstelle.
Zertifizierungsstelle	Stelle, die Zertifizierungen durchführt.

## Erläuterungen zu den Sicherheitskriterien

Dieses Kapitel gibt einen Überblick über die angewendeten Sicherheitskriterien und deren Bewertungsmaßstäbe. Textpassagen innerhalb „...“ stellen Zitate aus den ITSEC bzw. den ITSEM dar.

### - Grundbegriffe

*Sicherheit* ist nach dem Verständnis der ITSEC dann gegeben, wenn ausreichendes Vertrauen darin besteht, daß der Evaluationsgegenstand (EVG) seine *Sicherheitsziele* erfüllt.

*Sicherheitsziele* setzen sich in der Regel aus Forderungen nach Vertraulichkeit, Verfügbarkeit und / oder Integrität von bestimmten Datenobjekten zusammen. Solche Sicherheitsziele werden durch den Auftraggeber der Evaluierung festgelegt. Normalerweise ist dies bei einem IT-Produkt der Entwickler oder Vertreiber, bei einem IT-System der Betreiber.

Den festgelegten Sicherheitszielen stehen prinzipielle *Bedrohungen* gegenüber, nämlich der Verlust der Vertraulichkeit, der Verlust der Verfügbarkeit, der Verlust der Integrität bestimmter Datenobjekte.

Aus solchen prinzipiellen Bedrohungen werden *Angriffe*, wenn Subjekte unerlaubt Datenobjekte mitlesen oder abhören, Dritten vorenthalten oder unbefugt ändern.

*Sicherheitsfunktionen* des EVG sollen solche *Angriffe* abwehren.

Es stellen sich dabei zwei Grundfragen: Funktionieren die Sicherheitsfunktionen korrekt? Sind die Sicherheitsfunktionen wirksam?


Vertrauen in die Erfüllung der Sicherheitsziele kann man dann haben, wenn *Korrektheit* und *Wirksamkeit* geprüft (*evaluiert*) worden sind.

### - Evaluationsstufen

Eine Evaluierung kann nur mit begrenztem Aufwand und in begrenzter Zeit durchgeführt werden. Die mögliche Tiefe einer Evaluierung ist also stets begrenzt. Das Angemessenheitsprinzip verbietet es andererseits, bei geringem Sicherheitsbedarf eine extrem aufwändige Prüfung durchzuführen; ebenso unangemessen wäre es, bei höchstem Sicherheitsbedarf nur „oberflächlich“ zu prüfen.

Es ist deshalb sinnvoll, unterschiedliche Prüftiefen (und damit Prüfaufwände) festzulegen: In den ITSEC werden 6 Evaluationsstufen zur Prüfung von Korrektheit und Wirksamkeit definiert. E1 bezeichnet die niedrigste, E6 die höchste Stufe.

Die Vertrauenswürdigkeit eines EVG kann also in diesen Stufen „gemessen“ werden.



Die folgenden Auszüge aus den ITSEC lassen erkennen, welche Prüf Aspekte im Rahmen einer Evaluierung behandelt werden und welche Prüftiefe welcher E-Stufe entspricht.

- E1 „Auf dieser Stufe müssen für den EVG die Sicherheitsvorgaben und eine informelle Beschreibung des Architekturentwurfs vorliegen. Durch funktionale Tests muß nachgewiesen werden, daß der EVG die Anforderungen der Sicherheitsvorgaben erfüllt.“
- E2 „Zusätzlich zu den Anforderungen für die Stufe E1 muß hier eine informelle Beschreibung des Feinentwurfs vorliegen. Die Aussagekraft der funktionalen Tests muß bewertet werden. Ein Konfigurationskontrollsystem und ein genehmigtes Distributionsverfahren müssen vorhanden sein.“
- E3 „Zusätzlich zu den Anforderungen für die Stufe E2 müssen der Quellcode bzw. die Hardware-Konstruktionszeichnungen, die den Sicherheitsmechanismen entsprechen, bewertet werden. Die Aussagekraft der Tests dieser Mechanismen muß bewertet werden.“
- E4 „Zusätzlich zu den Anforderungen für die Stufe E3 muß ein formales Sicherheitsmodell Teil der Sicherheitsvorgaben sein. Die sicherheitsspezifischen Funktionen, der Architekturentwurf und der Feinentwurf müssen in semiformalen Notation vorliegen.“
- E5 „Zusätzlich zu den Anforderungen für die Stufe E4 muß ein enger Zusammenhang zwischen dem Feinentwurf und dem Quellcode bzw. den Hardware-Konstruktionszeichnungen bestehen.“
- E6 „Zusätzlich zu den Anforderungen für die Stufe E5 müssen die sicherheitsspezifischen Funktionen und der Architekturentwurf in einer formalen Notation vorliegen, die konsistent mit dem zugrundeliegenden formalen Sicherheitsmodell ist.“

In allen E-Stufen müssen darüber hinaus Wirksamkeitsaspekte nach folgendem Schema untersucht werden:

"Die Bewertung der Wirksamkeit erfordert die Betrachtung der folgenden Aspekte des EVG:

- a) die Eignung der sicherheitsspezifischen Funktionen des EVG, den in den Sicherheitsvorgaben aufgezählten Bedrohungen zu widerstehen;
- b) die Fähigkeit der sicherheitsspezifischen Funktionen und Mechanismen des EVG, in einer Weise zusammenzuwirken, daß sie sich gegenseitig unterstützen und ein integriertes, wirksames Ganzes bilden;
- c) die Fähigkeit der Sicherheitsmechanismen des EVG, einem direkten Angriff zu widerstehen;

- d) ob bekannte Sicherheitsschwachstellen in der Konstruktion des EVG in der Praxis die Sicherheit des EVG kompromittieren können;
- e) daß der EVG nicht in einer Weise konfiguriert werden kann, die unsicher ist, aber von der ein Systemverwalter oder ein Endnutzer vernünftigerweise glauben könnte, daß sie sicher ist;
- f) ob bekannte Sicherheitsschwachstellen beim Betrieb des EVG in der Praxis die Sicherheit des EVG kompromittieren können."

### - Sicherheitsfunktionen und Sicherheitsmechanismen

Sicherheitsfunktionen in einem EVG dienen der Abwehr von Bedrohungen.

Solche Sicherheitsfunktionen können in einer typischen Kombination („Funktionalitätsklasse“) vorkommen. Beispiel: Die Funktionalitätsklasse F-C2 setzt sich aus den Funktionen *Identifikation und Authentisierung*, *Zugriffskontrolle*, *Beweissicherung*, *Protokollauswertung* und *Wiederaufbereitung* zusammen. Diese Klasse ist bei vielen kommerziellen Betriebssystemen gegeben.


Jede Sicherheitsfunktion kann auf unterschiedlichste Weise realisiert werden. Beispiel: Die Funktion *Identifikation und Authentisierung* kann unter anderem durch ein Paßwort-Verfahren, durch Verwendung von Chipkarten mit Challenge-Response Verfahren oder durch biometrische Verfahren realisiert sein. Jede Realisierung dieser Art heißt (*Sicherheits-*)*Mechanismus* der Sicherheitsfunktion *Identifikation und Authentisierung*. Für andere Sicherheitsfunktionen gilt sinngemäß das gleiche.

Die Widerstandskraft eines Sicherheitsmechanismus gegenüber direkten Angriffen wird als *Stärke* des Mechanismus bezeichnet.

In den ITSEM werden zwei Arten von Mechanismen unterschieden: Typ B und Typ A.

Typ B „Ein Mechanismus vom Typ B ist ein Sicherheitsmechanismus, der bei perfekter Konzipierung und Implementierung keine Schwächen aufweist. Ein Mechanismus vom Typ B kann als nicht durch einen direkten Angriff überwindbar betrachtet werden, gleichgültig, wie groß der Aufwand an Ressourcen, Fachkenntnissen und entsprechenden Gelegenheiten ist. ... Mechanismen vom Typ B können jedoch durch indirekte Angriffe überwunden werden, mit denen sich andere Wirksamkeitsanalysen befassen.“

Typ A „Ein Mechanismus vom Typ A ist ein Sicherheitsmechanismus mit einer potentiellen Schwachstelle in seinem Algorithmus, seinen Prinzipien oder seinen Eigenschaften, aufgrund derer er durch Einsatz ausreichender Ressourcen, Fachkenntnisse und entsprechender Gelegenheiten mit einem direkten Angriff überwunden werden kann. ... Mechanismen vom Typ A bedienen sich häufig eines "Geheimnisses" wie etwa eines Paßwortes oder eines kryptographischen Schlüssels.“



„Alle Mechanismen vom Typ A ... haben eine Stärke, die dem Aufwand an Ressourcen, Fachkenntnissen und Gelegenheiten, zur Gefährdung der Sicherheit durch einen direkten Angriff auf den Mechanismus entspricht.“

Wie wird bei Mechanismen vom Typ A die Stärke definiert?

„Alle kritischen Sicherheitsmechanismen (d.h. diejenigen, deren Versagen eine Sicherheitslücke hervorrufen würde), werden hinsichtlich ihrer Fähigkeit bewertet, einem direkten Angriff zu widerstehen. Die Mindeststärke jedes kritischen Mechanismus wird entweder als niedrig, mittel oder hoch bewertet.“

niedrig: „Damit die Mindeststärke eines kritischen Mechanismus als niedrig eingestuft werden kann, muß erkennbar sein, daß er Schutz gegen zufälliges unbeabsichtigtes Eindringen bietet, während er durch sachkundige Angreifer überwunden werden kann.“

mittel: „Damit die Mindeststärke eines kritischen Mechanismus als mittel eingestuft werden kann, muß erkennbar sein, daß er Schutz gegen Angreifer mit beschränkten Gelegenheiten oder Betriebsmitteln bietet.“

hoch: „Damit die Mindeststärke eines kritischen Mechanismus als hoch eingestuft werden kann, muß erkennbar sein, daß er nur von Angreifern überwunden werden kann, die über sehr gute Fachkenntnisse, Gelegenheiten und Betriebsmittel verfügen, wobei ein solcher erfolgreicher Angriff als normalerweise nicht durchführbar beurteilt wird.“

## 1 Antragsteller und Evaluationsgegenstand

1 **Antragsteller** der Zertifizierung war die Siemens AG, ICN EN TNA, Charles-de-Gaulle Strasse 2-4, 81737 München.

2 Beantragt wurde ein „**Deutsches IT-Sicherheitszertifikat**“.

3 Evaluationsgegenstand (EVG) war „CardOS/M4.01A mit Applikation für digitale Signatur, konform mit SigG, SigV und DIN V 66291-1“, im Folgenden kurz bezeichnet als: CardOS/M4.01A mit Applikation für digitale Signatur.

4 Der EVG ist ein Chipkarten-Betriebssystem mit Signatur-Anwendung für den Infineon SLE66CX322P Chip.

5 Seitens des Auftraggebers sind Sicherheitsvorgaben für den EVG in englischer Sprache bereitgestellt worden. Die Sicherheitsvorgaben, letzte Version 2.2 vom 11.09.2002, werden im Anhang wiedergegeben.

6 Die Sicherheitsvorgaben referenzieren als Prüfkriterien die **ITSEC** und als Evaluationsstufe **E4**, für die Mindeststärke der Sicherheitsmechanismen wird **hoch** angegeben.

7 Dem Zertifizierungsverfahren wurde die Registriernummer T-Systems-DSZ-ITSEC-04084-2002 zugewiesen.


## 2 Maßgebende Prüfgrundlagen

8 Die Evaluierung des EVG erfolgte antragsgemäß gegen die

- Kriterien für die Bewertung der Sicherheit von Systemen der Informationstechnik (ITSEC) /ITSEC/.

9 Für die Evaluierung und Zertifizierung waren weiterhin folgende Dokumente maßgebend:

- Handbuch für die Bewertung der Sicherheit von Systemen der Informationstechnik (ITSEM) /ITSEM/,
- Joint Interpretation Library /JIL/,
- Anwendungshinweise und Interpretationen zum Schema, Bundesamt für Sicherheit in der Informationstechnik /AIS/,
- Arbeitsanweisung „Deutsches IT-Sicherheitszertifikat“ der T-Systems ISS GmbH (gültige Fassung).



### 3 Evaluierung

- 10 Die Evaluierung des EVG wurde durch die Siemens AG bei der Prüfstelle für IT-Sicherheit der T-Systems ISS GmbH beauftragt.
- 11 Die Prüfstelle ist nach ISO 17025 **akkreditiert** und besitzt eine gültige **Lizenz** der Zertifizierungsstelle und des BSI für das hier vorliegende Prüfgebiet.
- 12 Die Evaluierung erfolgte im Zertifizierungsschema der T-Systems ISS GmbH.
- 13 Die Evaluierung wurde durch die Zertifizierungsstelle kriteriengemäß begleitet.
- 14 Das Ergebnis der Evaluierung ist im **Evaluation Technical Report (ETR)** der Prüfstelle dargestellt. Der ETR trägt die Versionsnummer 2.03 und das Datum 23.09.2002.
- 15 Die Evaluierung des EVG wurde am 24.09.2002 beendet.

### 4 Zertifizierung

- 16 Das **Zertifizierungsschema** der T-Systems ISS GmbH ist auf den entsprechenden Web-Seiten der Zertifizierungsstelle veröffentlicht ([www.t-systems-zert.com](http://www.t-systems-zert.com)).
- 17 Die **Zertifizierungsstelle** der T-Systems ISS GmbH arbeitet im Einklang mit der DIN EN 45011 und ist im Hinblick auf diese Norm bei der DATech e.V. für Prüfungen nach den ITSEC und den Common Criteria akkreditiert (DAR-Registriernummer DIT-ZE-005/98).
- 18 Die **Zertifizierung** des EVG erfolgte wie beantragt gemäß **Verfahrenstyp 04**: „Deutsches IT-Sicherheitszertifikat“.
- 19 Für die Zertifizierung des EVG sind **Auflagen** und **Empfehlungen** maßgebend; näheres enthält das Kapitel 5.
- 20 Eine **Kurzfassung** der Ergebnisse enthält das Sicherheitszertifikat T-Systems-DSZ-ITSEC-04084-2002 vom 24.09.2002 auf der Seite 3 dieses Zertifizierungsreports.
- 21 Das Zertifikat trägt das vom Bundesamt für Sicherheit in der Informationstechnik (BSI) genehmigte Logo [Deutsches IT-Sicherheitszertifikat] und wird vom BSI als gleichwertig zu seinen eigenen Zertifikaten anerkannt. Das BSI bestätigt vertragsgemäß diese Gleichwertigkeit im internationalen Kontext.



22 Das Zertifikat und der Zertifizierungsreport sind auf den Web-Seiten ([www.t-systems-zert.com](http://www.t-systems-zert.com)) der Zertifizierungsstelle veröffentlicht und werden in den Broschüren BSI 7148 / 7149 des Bundesamtes für Sicherheit in der Informationstechnik (BSI) referenziert.

23 Hiermit wird bestätigt, daß


- die am Verfahren beteiligten Evaluatoren und Zertifizierer weder an der Entwicklung, dem Vertrieb noch an einer Anwendung des EVG beteiligt waren,
- alle Regeln des Zertifizierungsschemas, des speziellen Verfahrenstyps und der maßgebenden Kriterien eingehalten wurden.

Klaus-Werner Schröder

(Zertifizierer)

Dr. Heinrich Kersten

(Leiter der Zertifizierungsstelle)



## 5 Zusammenfassung der Ergebnisse

24 Evaluiert wurden die folgenden Konfigurationen des EVG:

Der EVG basiert auf der ROM-Maske Version C804 (CardOS/M4.01A); diese ist identisch für alle Konfigurationen des EVG. Ebenfalls identisch für alle Konfigurationen des EVG ist das Grundgerüst der Signaturapplikation. Ferner wird während des Personalisierungsvorgangs ein Service Package auf den EVG geladen; auch dieses ist für alle Konfigurationen identisch.

Die Konfigurationen des EVG unterscheiden sich in den folgenden Punkten:

Die Personalisierung kann zentral oder dezentral erfolgen.

- Im zentralen Fall erfolgt die Personalisierung vollständig im Trust Center (Certification Authority); dabei kommt das Personalisierungsscript für die zentrale Personalisierung zum Einsatz.
- Im dezentralen Fall erfolgt eine sogenannte Vorphersonalisierung im Trust Center (Certification Authority) mit Hilfe des Vorphersonalisierungsscripts. Anschließend vollendet eine lokale Registrierungsstelle (Local Registration Authority, LRA) die Personalisierung; diese sogenannte Nachpersonalisierung in der LRA wird mit Hilfe des Nachpersonalisierungsscripts ausgeführt.

Die personenbezogene Konfiguration des EVG, die für Endkunden (Kartenhalter) bestimmt ist, erlaubt nach Authentisierung mittels PIN die Erzeugung genau einer elektronischen Signatur. Diese Konfiguration wird kurz mit „**n = 1**“ bezeichnet. Gegenstand der Evaluierung waren auch Signaturmodule, die zum Einsatz in speziell gesicherten Umgebungen (z.B. Trust Center) bestimmt sind und die nach einmaliger PIN-Authentisierung die Generierung von mehreren oder unendlich vielen Signaturen erlauben. Diese Konfigurationen werden kurz mit „**n ≠ 1**“ bezeichnet.

Die Bezeichnung lehnt sich an einen technischen Parameter an, über den dieses Verhalten gesteuert wird. In den Fällen  $n=0$  und  $n=255$  können nach einmaliger PIN-Authentisierung unendlich viele Signaturen erzeugt werden, in allen anderen erlaubten Fällen ( $1 \leq n \leq 254$ ) können genau  $n$  Signaturen erzeugt werden. Um ein Signaturmodul zu erstellen, ist eine Anpassung der Personalisierung erforderlich. Die Personalisierungsstellen werden über das anzuwendende Vorgehen informiert und zu besonderer Sorgfalt verpflichtet, damit nicht versehentlich Signaturmodule als personenbezogene Karten an Endkunden (Kartenhalter) geliefert werden.

25 Das Evaluierungsergebnis gilt nur für diese Konfiguration(en) des EVG.

- 26 Entsprechend den Sicherheitsvorgaben und dem Ergebnis der Evaluierung besitzt der EVG folgende **Sicherheitsfunktionen**:

Identifikation und Authentisierung, Zugriffskontrolle, Protokollauswertung, Wiederaufbereitung, Übertragungssicherung

- 27 Die Evaluierung hat ergeben, daß der EVG allen Anforderungen der **Evaluationsstufe** E4 der ITSEC genügt, d.h. alle Anforderungen an die Korrektheit und Wirksamkeit in dieser Stufe sind erfüllt. Dies sind:

ITSEC E4.1 bis E4.37 für die Korrektheit mit den Phasen

*Konstruktion - Entwicklungsprozeß:*

Anforderungen, Architekturentwurf, Feinentwurf, Implementierung

*Konstruktion - Entwicklungsumgebung:*

Konfigurationskontrolle, Programmiersprachen und Compiler, Sicherheit beim Entwickler

*Betrieb - Betriebsdokumentation:*

Benutzerdokumentation, Systemverwalter-Dokumentation

*Betrieb - Betriebsumgebung:*

Auslieferung und Konfiguration, Anlauf und Betrieb

ITSEC 3.12 bis 3.37 für die Wirksamkeit mit den Aspekten

*Wirksamkeitskriterien - Konstruktion:*

Eignung der Funktionalität, Zusammenwirken der Funktionalität, Stärke der Mechanismen, Bewertung der Konstruktionsschwachstellen

*Wirksamkeitskriterien - Betrieb:*

Benutzerfreundlichkeit, Bewertung der operationellen Schwachstellen


- 28 Hinsichtlich der **Sicherheitsmechanismen** lautet das Ergebnis der Evaluierung:

Die folgenden Mechanismen des EVG sind kritische Mechanismen: alle.

Die folgenden Mechanismen sind vom Typ A und haben eine Mindeststärke gemäß der Stufe **hoch**: M1, M2, M4, M5, M10, M11 (vgl. Security Target).

Die folgenden Mechanismen sind vom Typ B: alle übrigen.

Für Mechanismen des Typs B ist gemäß den zugrunde liegenden Kriterien keine Mechanismenstärke anzugeben. Im Rahmen der Schwachstellenanalyse konnte jedoch festgestellt werden, daß selbst unter Zugrunde-



gung eines Aufwands gemäß der Stufe **hoch** bei den angenommenen Einsatzbedingungen keine ausnutzbare Schwachstelle erkennbar ist.

- 29 Die **Auslieferung** des Produktes erfolgt entsprechend den Angaben des Auftraggebers nach folgendem Verfahren:

Auslieferung per Kurier

Dieses Auslieferungsverfahren entspricht den Vorgaben der nationalen Zertifizierungsbehörde für die Stufe E4 der ITSEC.

- 30 Folgende Auflagen sind durch den Auftraggeber zu erfüllen:


1. Das Zertifikat T-Systems-DSZ-ITSEC-04084-2002 und dieser Zertifizierungsreport gelten nur für CardOS/M4.01A mit Applikation für digitale Signatur in Verbindung mit der Hardware SLE66CX322P, deren **Chip Type Identifier '6C'** (hexadezimal) ist und die in der **Production Line Number "2" (für Dresden)** hergestellt wurde.
2. Die für die Anwendung in SigG-konformen elektronischen Signaturen geeigneten Kryptomechanismen werden gemäß /SIGV/, Anlage 1, I. 2. Algorithmen – Veröffentlichung und Neubestimmung der Eignung im Bundesanzeiger veröffentlicht. Nach der gegenwärtig gültigen Veröffentlichung (Geeignete Kryptoalgorithmen, 05.07.2001, Bundesanzeiger Nr. 158 Seite 18 562, 24. August 2001) sind die im EVG implementierten Algorithmen (Hash-Algorithmus SHA-1 und RSA-Algorithmus mit 1024 bits) bis Ende 2006 geeignet. Die Evaluationsergebnisse zur Eignung des EVG entsprechend den Sicherheitszielen SO6 „Quality of key generation“ und SO7 „Provide secure digital signature“ sind deshalb zunächst bis 2006 gültig und müssen dann überprüft werden.
3. Eine Re-Evaluierung des EVG wird dann erforderlich, wenn sich neue Erkenntnisse über Angriffsmethoden ergeben, welche die vom EVG verwendeten kryptographischen und anderen Sicherheitsmechanismen betreffen und die erfolgreiche Angriffe auf die Sicherheit des EVG wahrscheinlich machen, so dass der Verdacht besteht, dass die Mechanismenstärke hoch nicht mehr gewährleistet ist.
4. Es wird folgendes Verfahren für die Bereitstellung der Hardware SLE66CX322P vorgeschrieben: Der Hersteller Siemens AG, ICN EN TNA muss Wafer oder Module am Infineon Warehouse in Regensburg persönlich abholen.
5. Bei der Auslieferung der Benutzerdokumentation (s. Security Target) ist darauf zu achten, dass sie vollständig ausgeliefert wird.

- 31 Folgende zusätzliche Hinweise sind für den sicherheitsgerechten Einsatz des EVG zu beachten:

1. Sofern **CardOS/M4.01A mit Applikation für digitale Signatur**, implementiert auf der Hardware SLE66CX322P, zur Erzeugung qualifizierter elektronischer Signaturen nach dem Signaturgesetz /SigG/ verwendet werden soll, muss der Zertifizierungsdiensteanbieter in seinem Sicherheitskonzept alle Maßnahmen beschreiben, die für eine sichere Personalisierung erforderlich sind.
2. Zum Einsatz in besonders gesicherter Umgebung bestimmte Signaturmodule (Konfiguration  $n \neq 1$ ) dürfen nicht als personenbezogene EVG (Konfiguration  $n = 1$ ) an Endkunden (Kartenhalter) ausgeliefert werden. Es ist die Aufgabe der herausgebenden Stellen bzw. der Zertifizierungsdiensteanbieter, dies sicherzustellen.
3. Von den Abläufen der Komplettierung, Initialisierung und Personalisierung gemäß der Dokumente *CardOS/M4.01A Auslieferung, Generierung und Konfiguration* und *CardOS/M4.01A Dokumentation für Trust Center* darf nicht abgewichen werden. Diese Abläufe schließen Bedienfehler aus und müssen Bestandteil des Sicherheitskonzepts der Zertifizierungsdiensteanbieter sein. Ebenso dürfen die Personalisierungsscripte nur an den durch Kommentare kenntlich gemachten Stellen im Sinne der Kommentare angepasst werden.
4. Die Generierung von Signaturschlüsselpaaren darf nur in sicherer Umgebung (innerhalb eines Trust Centers) erfolgen.
5. Der EVG ist in folgendem Punkt nicht konform zur DIN V 66291-1: Der EVG lässt lesenden Zugriff auf das Kartenhalter-Zertifikat C.CH.DS (gespeichert im EF\_C\_CH\_DS) stets zu und sichert diesen nicht durch die PIN.

## 6 Anwendung der Ergebnisse

- 32 Die Prozesse der Evaluierung und Zertifizierung werden nach dem Stand der Technik durchgeführt, können aber keine *absolute* Garantie dafür geben, daß der EVG frei von Schwachstellen ist. Mit steigender Evaluationsstufe verringert sich allerdings die Wahrscheinlichkeit erheblich, daß *ausnutzbare* Schwachstellen unentdeckt bleiben.
- 33 Der Zertifizierungsreport dient dem Auftraggeber als Nachweis der durchgeführten Evaluierung und dem Nutzer als eine Grundlage für die sichere Nutzung des EVG.
- 34 Für die sichere Nutzung des EVG enthalten insbesondere die folgenden Stellen im Zertifizierungsreport wichtige Informationen:
- Kapitel 1: die genaue Produkt- und Versionsbezeichnung:  
Zertifikat und Zertifizierungsreport gelten nur für dieses Produkt und diese spezielle Version.



- Kapitel 5: Angaben zum Auslieferungsverfahren des EVG.  
Andere Auslieferungsverfahren können unter Umständen nicht die für die Stufe E4 erforderliche Sicherheit bieten.
  - Kapitel 5: Angaben zu evaluierten Konfigurationen des EVG.  
Der EVG gilt nur in diesen Konfigurationen als zertifiziert.
  - Kapitel 5: Hinweise für den Nutzer des EVG.  
Die Sicherheit bei der Anwendung des EVG kann ggf. nicht mehr gegeben sein, wenn diese Hinweise nicht beachtet werden.
  - Anhang: Sicherheitsvorgaben zum EVG.  
Hier sind insbesondere die Informationen zur Art der Nutzung des EVG, zum Lieferumfang, zu seinen Sicherheitszielen bzw. den betrachteten Bedrohungen und zur Einsatzumgebung zu beachten.
- 35 Falls Anforderungen aus diesem Report nicht eingehalten werden, gilt das Evaluationsergebnis nur noch bedingt. In einem solchen Fall ist eine ergänzende Analyse erforderlich, um festzustellen, ob und in welchem Umfang der EVG auch unter den geänderten Bedingungen noch Sicherheit bieten kann. Die Prüfstelle und die Zertifizierungsstelle können bei der Analyse unterstützen.
- 36 Bei Änderungen an dem EVG, an seinem Auslieferungsverfahren oder seiner Einsatzumgebung kann eine **Re-Zertifizierung** erfolgen. Die Ergebnisse solcher nach den Verfahrensregeln der Zertifizierungsstelle durchgeführten Re-Zertifizierungen werden in entsprechenden technischen Anhängen zu diesem Zertifizierungsreport dokumentiert.
- 37 Bei neuen Erkenntnissen über die Sicherheit des EVG können ebenfalls technische Anhänge zum Zertifizierungsreport herausgegeben werden.
- 38 Den Web Seiten ([www.t-systems-zert.com](http://www.t-systems-zert.com)) der Zertifizierungsstelle ist zu entnehmen, ob
- technische Anhänge zu diesem Zertifizierungsreport herausgegeben worden sind (die Anhänge werden fortlaufend nummeriert: T-Systems-DSZ-ITSEC-04084-2002/1, .../2,...),
  - neue Versionen des EVG sich in der Evaluierung befinden bzw. bereits zertifiziert worden sind.

Ende des Zertifizierungsreports zu T-Systems-DSZ-ITSEC-04084-2002.

**Anhang.**

Sicherheitsvorgaben zu

„CardOS/M4.01A mit Applikation für digitale Signatur“

(Diese Seite ist beabsichtigterweise leer.)



**CardOS/M4.01A with Application for Digital  
Signature Creation  
(as ICC embedded software conforming with  
German SigG, SigV and DIN V 66291-1)**

**Security Target**

SIEMENS AG  
ICN EN TNA  
Charles-de-Gaulle-Strasse 2-4  
D-81737 Munich

Version 2.2

---

**Change History**

<b>Version</b>	<b>date</b>	<b>Changes</b>
0.10	08.2000	First Edition CardOS M4.0 based on the Version 0.99 of Tele Trust Deutschland
0.11	31.08.2000	Revision through debis; editorial changes, unused options removed
0.12	06.10.2000	Revision through Siemens; editorial changes
0.13	13.10.2000	Revision through debis; editorial changes, some opened questions
0.14	06.11.2000	Revision through Siemens; change from S-Chip to P-Chip and editorial changes
0.15	8.12.2000	Revision through Siemens and debis, editorial changes
0.16	19.12.2000	Revision through Siemens and debis: <ul style="list-style-type: none"> <li>• OR1.2 changed, hardware assumptions added</li> <li>• IA1.1.1 and IA1.1.2: wording</li> <li>• TOE behaviour with security violation flag A redefined</li> </ul>
1.0	15.01.2001	Final revision through Siemens, editorial changes
1.01	20.03.01	print errors (definition of CAS2)
1.02	15.01.2002	Update of Table 1, Update of references to SigG and SigV
1.03	20.02.2002	Footnote to M1: In fact the part of M1 detecting the “Potential attacker” is implemented by the mechanismus M7.
1.04	25.02.2002	Update of Table 1
1.05	04.03.2002	no temperature sensor on the ICC (AE5.3)
2.1	08.08.2002	Updates for CardOS/M4.01A with ICC 66CX322P
2.2	11.09.2002	Added temperature sensor (AE5.3), which exists for ICC 66CX322P

## Table of Contents

<b>1. PRODUCT RATIONALE</b>	<b>1</b>
<b>1.1. Product Overview</b>	<b>1</b>
<b>1.2. Identification of TOE</b>	<b>2</b>
<b>1.3. Intended method of use</b>	<b>4</b>
<b>1.4. Assumptions about the environment</b>	<b>8</b>
1.4.1. Life cycle security (AE1)	8
1.4.2. Integrity and quality of key material (AE2)	9
1.4.3. SigG compliant use of the TOE (AE3)	9
1.4.4. Use with SigG compliant IFD (AE4)	10
1.4.5. Security assumption about the ICC hardware (AE5)	11
<b>1.5. Assumed Threats</b>	<b>11</b>
1.5.1. Extraction of the cardholder's private key (T1)	12
1.5.2. Misuse of the signature function (T2)	13
1.5.3. Forged data ascribed to the cardholder (T3)	13
<b>1.6. Summary of Security Features</b>	<b>13</b>
1.6.1. Prevent disclosure, copying or modification of the cardholder's private key (SO1)	14
1.6.2. Prevent unauthorised use of the SigG digital signature function (SO2)	15
1.6.3. Quality of key generation (SO6)	15
1.6.4. Provide secure digital signatures (SO7)	16
1.6.5. React to potential security violations (SO8)	17
<b>2. SECURITY FUNCTIONS</b>	<b>18</b>
<b>2.1. Definitions and Global Substitutions</b>	<b>18</b>
2.1.1. Subjects	18
Subject S1 Cardholder	18
Subject S2 Somebody	18
Subject S3 IFD	19
Subject S7 Potential attacker	19
2.1.2. <i>Security-relevant-events</i>	19
Security-relevant-event SRE1 Resetting of the ICC	20
Security-relevant-event SRE2 Deactivation of the ICC	20
Security-relevant-event SRE3 Opening of the SigG application	20
Security-relevant-event SRE4 Closing of the SigG application	20
Security-relevant-event SRE5 Successful cardholder authentication	20
Security-relevant-event SRE6 Cardholder authentication failure	21
Security-relevant-event SRE7 Repeated authentication failure	21
Security-relevant-event SRE8 Authentication expiration	21
Security-relevant-event SRE10 Potential security violation occurred	22
Security-relevant-event SRE11 Cardholder authenticated for PIN unblocking and changing by reset code	22
Security-relevant-event SRE12 Authentication for PIN unblocking and changing by reset code failed	22
2.1.3. Substitutions for the placeholders " <i>object</i> " and " <i>access-types</i> "	23
Object O1 SigG application	23
Object O2 SigG private signature key of the cardholder	23
Object O3 SigG cardholder reference data	24
Object O4 SigG cardholder reference reset code	24

---

Object O5 SigG signature key certificate of the cardholder	25
Object O6 SigG public key of the root certification authority	25
Object O12 SigG public key of the cardholder	25
<b>2.2. Informal Description</b>	<b>25</b>
2.2.1. Identification and Authentication	25
IA1 Authentication of human user	25
IA2 Changing reference data	27
IA3 Blocking the reference data	27
IA4 Unblocking and changing the reference data (Reset Retry Counter)	27
2.2.2. Access Control	27
AC1 Access control of commands	27
AC2 Access control of extraction	29
AC3 Secure blocking state	30
2.2.3. Audit	30
AU1 Information about secure blocking state	30
2.2.4. Object Reuse	30
2.2.5. Data Exchange	30
DX1 Key Generation	30
DX2 Digital signature generation	31
<b>2.3. Semiformal specification of the security function</b>	<b>31</b>
2.3.1. Identification and Authentication	31
2.3.2. Access Control	34
2.3.3. Audit	35
2.3.4. Object Reuse	35
2.3.5. Data Exchange	36
<b>3. UNDERLYING SECURITY POLICY</b>	<b>38</b>
3.1. Security state	38
3.2. Access control for command execution	44
<b>4. SECURITY MECHANISMS</b>	<b>46</b>
4.1. M1: Human user authentication	46
4.2. M2: Change the unblocked reference data	47
4.3. M3: Locking of the reference data	47
4.4. M4: Unblocking and changing of the reference data	48
4.5. M5: Extraction resistance	48
4.6. M6: Access control for command execution	49
4.7. M7: Secure blocking state	49
4.8. M9: Clearing of memory	49
4.9. M10: Signature key pair generation	49
4.10. M11: Signature generation	50

---

<b>5. SUITABILITY OF THE TOE'S SECURITY FEATURES</b>	<b>51</b>
<b>6. EVALUATION TARGET</b>	<b>53</b>
<b>7. LIST OF ABBREVIATIONS</b>	<b>54</b>
<b>8. GLOSSARY</b>	<b>57</b>
<b>9. REFERENCES</b>	<b>63</b>

---

## **Figures**

<b>Figure 1: Card Life Cycle Phases and Transitions between them</b>	<b>5</b>
<b>Figure 2: Threat Scenario (in case of method of use “Office IFD only”)</b>	<b>12</b>
<b>Figure 3: Logical decision-tree diagram</b>	<b>40</b>
<b>Figure 4: State transition diagram</b>	<b>43</b>

## **Tables**

<b>Table 1: Components of the TOE</b>	<b>3</b>
<b>Table 2: Logical initialization and personalization of the SigG Application</b>	<b>6</b>
<b>Table 3: Assumptions about the environment</b>	<b>8</b>
<b>Table 4: Security Threats</b>	<b>12</b>
<b>Table 5: Security objectives</b>	<b>14</b>
<b>Table 6: Subjects</b>	<b>18</b>
<b>Table 7: Security-relevant-events</b>	<b>19</b>
<b>Table 8: Objects and related access-types</b>	<b>23</b>
<b>Table 9: Access-set <math>acy(s,o)</math> of SEF AC1</b>	<b>28</b>
<b>Table 10: Access-set <math>acn(o,s)</math> of SEF AC1</b>	<b>28</b>
<b>Table 11: Identification of different current authentication states</b>	<b>39</b>
<b>Table 12: State transition table</b>	<b>41</b>
<b>Table 13: Access-sets <math>ssy(o,t)</math> defined in terms of the security states</b>	<b>44</b>
<b>Table 14: Access-sets <math>ssn(o,t)</math> defined in terms of the security states</b>	<b>45</b>
<b>Table 15: Security mechanisms</b>	<b>46</b>
<b>Table 16: Mapping between the threats, the security objectives and the SEF</b>	<b>51</b>

### 1. Product Rationale

#### 1.1. Product Overview

CardOS/M4 is a multifunctional smart card operating system supporting active and passive data protection. The operating system is designed to meet the most advanced security demands. CardOS/M4 complies with the ISO standard family ISO 7816 part 3, 4, 5, 8 and 9.

CardOS/M4 is designed to meet the requirements of the German Digital Signature Act ([6], [7]).

The versatile and feature rich operating system supports rapid application development on smart cards. Nearly every function of the operating system can easily be parameterized, even after the initial personalization of cards, if required.

A patented scheme for initialization/personalization provides for cost efficient mass card production by card manufacturers.

#### CardOS/M4 Features

##### General features:

- CardOS/M4 runs on the Infineon SLE66 chip family. The SLE66CX322P chip with embedded security controller for asymmetric cryptography and true random number generator has successfully been certified against the Common Criteria EAL5+ security requirements [14].
- Shielded against all presently known security attacks
- All commands are compliant with ISO 7816-4, -8 and -9 standards.
- PC/SC- compliance and CT-API
- Cleanly structured security architecture and key management
- Customer and application dependent configurability of card services and commands
- Extensibility of the operating system using loadable software components (packages)

##### File system

CardOS/M4 offers a dynamic and flexible file system, protected by chip specific cryptographic mechanisms:

- Arbitrary number of files (EFs, DFs)
- Nesting of DFs limited by memory only
- Dynamic memory management aids in optimum usage of the available EEPROM.
- Protection against EEPROM defects and power failures

##### Access control

- Up to 126 distinct programmer definable access rights

## Security Target

- Access rights may be combined with arbitrary Boolean expressions.
- Any command or data object may be protected with an access condition scheme of its own.
- All security tests and keys are stored as so-called key objects in the DF bodies (no reserved file IDs for key- or PIN files).
- Security structure may be refined incrementally after file creation without data loss.

### **Cryptographic Services**

- Implemented algorithms: RSA 1024 Bit (PKCS#11), SHA-1, , Triple-DES (CBC), DES (ECB, CBC), MAC, Retail-MAC
- Protection against Differential Fault Analysis ("Bellcore-Attack")
- Protection of DES and RSA against SPA<sup>1</sup> and DPA<sup>2</sup>
- Support of "Command Chaining" following ISO 7816-8
- Asymmetric key generation "on chip" using the onboard true random number generator
- Digital Signature functions "on chip"
- Connectivity to external Public Key certification services

### **Secure Messaging**

- Compatible with ISO 7816-4
- may be defined for every command and every data object (files, keys) independently.

## **1.2. Identification of TOE**

The integrated circuit card (ICC) contains

- (1) the target of the evaluation (TOE) and
- (2) data of other applications.

The TOE consists of

- (1) all software residing on the card (executable data including RMS),
- (2) all (non-executable) data used for the SigG application on the ICC.

The TOE provides functions

- (1) to create the SigG application (including the cardholder specific data ) within the card during the initialization and personalization phases in the ICC life cycle, which are represented by the administration phase in CardOS,
- (2) to generate digital signatures,
- (3) to provide security for the digital signature generation and

---

<sup>1</sup> Simple Power Analysis

<sup>2</sup> Differential Power Analysis



## Security Target

(4) to generate asymmetric key pairs on the ICC.

Other parts of the TOE software are needed

(1) to use the SigG application with additional functions which may include signature verification,

(2) to provide specific functions for non-SigG applications which may also reside on the card and are different from SigG application,

(3) to provide other ICC functions which are not specific for the applications.

The data of the non-SigG applications (i) are stored in directories and files of the ICC, (ii) are not executed as code by the TOE and (iii) are not subject of the evaluation.

The TOE is a product.

The TOE consists of the following components:

**Table 1: Components of the TOE**

No.	Type	Term	Version	Date	Form of delivery
1	Software (OperatingSystem)	CardOS M4.01A	C804	17.05.2002	loaded in ROM / EEPROM
2	Software (Application / Data Structure)	SigG application	2.1	29.07.2002	loaded in EEPROM
3	Documentation	CardOS/M4 User's Manual	1.0	10/2001	Paper form or PDF-File
4	Documentation	CardOS/M4 User's Manual - correction sheet	2.0	06/2002	Paper form or PDF-File
5	Documentation	CardOS/M4.01 Benutzerdokumentation für Kartenhalter	1.02	27.02.2002	Paper form or PDF-File
6	Documentation	CardOS/M4.01A Benutzerdokumentation für Kartenhalter	2.1	08.07.2002	Paper form or PDF-File
7	Documentation	CardOS/M4.01 Benutzerdokumentation für Terminalentwickler	1.12	27.02.2002	Paper form or PDF-File
8	Documentation	CardOS/M4.01A Benutzerdokumentation für Terminalentwickler	2.0	17.06.2002	Paper form or PDF-File
9	Documentation	CardOS/M4.01 Dokumentation für Trust Center	1.02	27.02.2002	Paper form or PDF-File
10	Documentation	CardOS/M4.01A	2.0	17.06.2002	Paper form or

## Security Target

		Dokumentation für Trust Center			PDF-File
11	Documentation	CardOS/M4.01 Auslieferung, Generierung und Konfiguration	1.1	18.12.2001	Paper form or PDF-File
12	Documentation	CardOS/M4.01A Auslieferung, Generierung und Konfiguration	2.0	17.06.2002	Paper form or PDF-File

The TOE is running on the Infineon chip SLE66CX322P. The ICC's hardware is not part of the TOE.

CardOS, the first component of Table 1, contains among others a package with corrections of the CardOS system software

### 1.3. Intended method of use

The TOE is intended to provide the digital signature function to the legitimate cardholder acting as owner of the individual ICC equipped with the signature key of the cardholder in accordance with the SigG legislative [6], [7] and the standard [9].

The development and manufacturing of the ICC's software and hardware leads to the ICC being ready to be used for a specific purpose (application). The ICC will be loaded with the SigG application including cardholder specific data in the personalization phase of the ICC. The TOE implements security features to ensure secure personalization of the ICC.


The TOE is used to **generate** the cardholder's signing key pair (SK.CH.DS, PK.CH.DS)

### Card Life Cycle

In order to secure the personalization of a CardOS the TOE's different so-called life cycle phases are provided, which are shown in **Figure 1**

Figure 1: Card Life Cycle Phases and Transitions between them

## Life Cycle Phases and Commands for Transitions

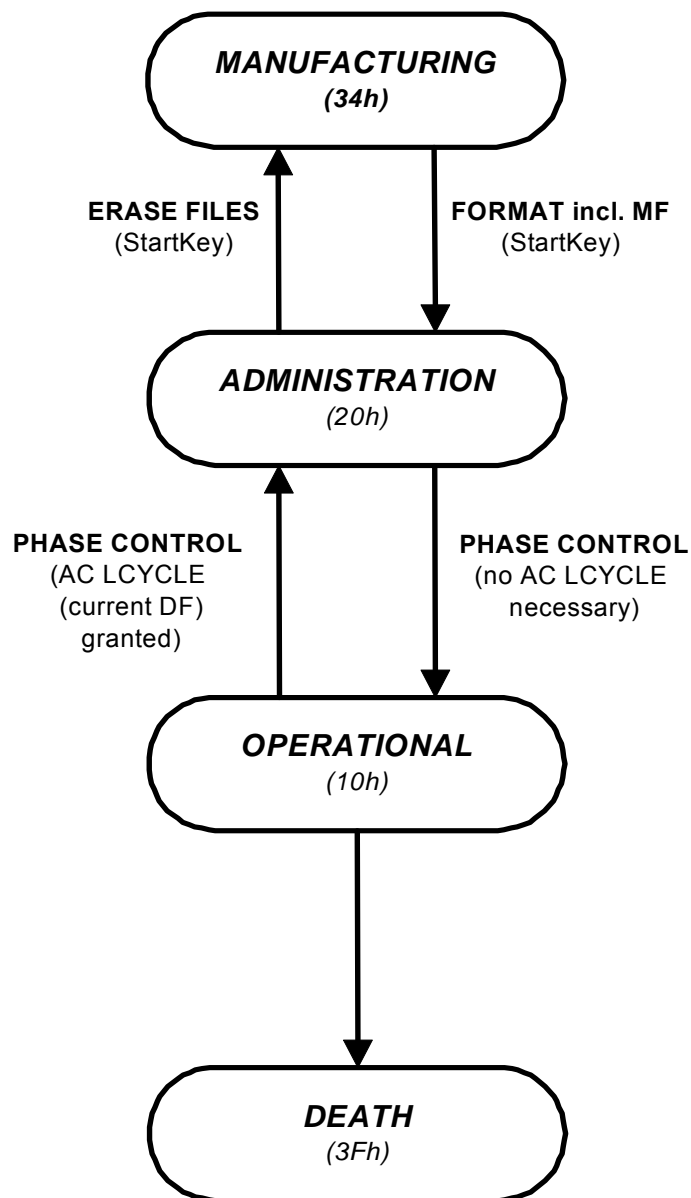

The administration phase comprises the logical initialization und personalization phases.

## Security Target

The TOE always “knows” of its current life cycle phase.

Transitions between the life cycle phases are possible using the specified commands and system keys. All transitions shown in **Figure 1**, except the transition from the *OPERATIONAL* to the *ADMINISTRATION* phase, are permanent.

A permanent transition means that the current life cycle phase is not affected by a reset of the ICC.

The transition from the *OPERATIONAL* to the *ADMINISTRATION* phase is only temporary. After a reset of the ICC the current life cycle phase will be *OPERATIONAL* again.

CardOS uses two system keys, they are 16 bytes (triple-) DES Keys:

1. StartKey: To change the Life cycle from Manufacturing to Administration and back,
2. LoadPackageKey: To activate the CodePackage.

**Table 3: Logical initialization and personalization of the SigG Application**

Step	Phase	Action
1.	Manufacturing	Card authentication with StartKey
2.	Manufacturing	change StartKey
3.	Manufacturing	Change life cycle phase to Administration (implicit create MF)
4.	Administration	Bringing in administrative keys <sup>3</sup>
5.	Administration	Read Serial number
6.	Administration	Create file structure
7.	Administration	Filling file contents
8.	Administration	Load and activate Packages (with PackageLoadKey)
9.	Administration	Generate key pair
10.	Administration	Read Public Key
11.	Administration	write certificates
12.	Administration	Delete not needed Packages
13.	Administration	Restricting access rights
14.	Administration	Change life cycle phase to Operational
15.	Operational	Initialization and Personalization is completed. When this life cycle phase has been reached then the TOE is issued to the customer. The customer cannot switch to any other phase of the TOE.

It's allowed to initialise and personalise other file structures besides SigG, e.g. between the steps 4-5 and 5-6 or between the steps 10-11 or 11-12.

<sup>3</sup> e.g. challenge response and secure messaging keys

**DEATH**

In this life cycle phase of the TOE all smart card commands except the GET DATA command are disabled. Other TOE functionality is blocked irreversibly.

The life cycle phase DEATH will be reached if one of several special events occur in the TOE (EEPROM weakness, filesystem or EEPROM corrupted or potential security violation flag has been set (Active Shield))

Each life cycle phase has a specific command set.

In the operational phase the cardholder uses the TOE by providing it to some IT system, which contains the message to which the cardholder wishes to apply a digital signature. The TOE and the IT system communicate through an interface device (IFD). Moreover the IFD is the human interface to the TOE.

In this context we distinguish between an “**office IFD**” and a “**public IFD**”. They differ in environmental usage: An **office IFD** is located in a certain well-known environment, whereas a **public IFD** is located in an unknown environment. The difference between **office IFD** and **public IFD** is not visible to the TOE, it is only known to the cardholder (CH). The cardholder is assumed to always know, whether he is using the TOE in an **office IFD** or in a **public IFD**.

The **SigG application** must be used **with Office IFDs only**. During the administration phase the TOE may be used at an IFD within a CA/RA. This IFD is not an **office IFD**; the security function will be provided by the secure environment of the CA/RA in this case. Since the ICC can contain other applications as well (see above), the ICC may also be used with Public IFDs. Since the difference between **office IFD** and **public IFD** is not visible to the TOE, the TOE cannot prevent the use of the SigG application with Public IFDs; the cardholder is responsible for not using the SigG application with Public IFDs.

In order to use the SigG signature generation the cardholder has to authenticate himself to the TOE. The IFD presents the verification data of the cardholder to the TOE. After a successful authentication and in dependence of the configuration, the TOE allows to generate exactly *one digital signature*. For special cards (Security model for TrustCenter) the TOE allows to generate (i) 1 till  $n$  or (ii) an unlimited number of digital signatures.

The IT system (i) transforms the message text into the hash-value and transmits the hash-value to the TOE or (ii) transmits the complete message text to be hashed by the TOE (see [9]). The TOE calculates the digital signature of the hash-value with the SigG private signature key of the cardholder stored in the TOE. The TOE returns the digital signature to the IFD. The SigG private signature key of the cardholder never leaves the ICC.

The ICC may be used as multi-application smart card. In this case an additional application may have been loaded on the ICC in the administration phase. But the TOE prevents the execution of executable data possibly existing in this additional application.

The TOE is equipped with a **transport PIN** that secures the TOE during its delivery to the cardholder. The transport PIN has a length of 5 digits. During his first authentication, the

## Security Target

cardholder has to enter this transport PIN and to change his operational PIN with a length of at least 6 digits; otherwise the authentication will fail<sup>4</sup>. After the successful authentication with the transport PIN this PIN will be blocked forever. The operational PIN and PUK can only be used after a successful authentication with the transport PIN. This ensures that before the TOE can be used to generate signatures, the operational PIN has to be changed. Whenever the PIN is changed in the future, the PIN also has to be at least 6 digits long. As the transport PIN can be used successfully only once, an accepted first authentication ensures that nobody has authenticated before with the transport PIN. In this case the cardholder can also be sure that nobody has used the TOE before to generate a digital signature.

The TOE does not support the ISO command TERMINATE CARD USAGE. Instead, (i) the expiration of the PUK leads to a state in which the DF<sub>SigG</sub> is permanently blocked and the SigG Application cannot be used any more. Or (ii) if a potential security violation is detected (AE5.4) the TOE is blocked as described in SO8.

### 1.4. Assumptions about the environment

Some assumptions about conditions being external to the TOE are made in order to ensure the effectiveness of the TOE's security functions (see Table 4).

**Table 4: Assumptions about the environment**

<b>Id</b>	<b>Assumption</b>
AE1	Life cycle security
AE2	Integrity and quality of key material
AE3	SigG compliant use of the TOE
AE4	Use with SigG compliant IFD
AE5	Technical assumption about the ICC hardware

#### 1.4.1. Life cycle security (AE1)

The TOE is expected in the first place to enforce the security objectives as described in section 1.6 within the operational use phase. In order to have the TOE's security objectives effectively fulfilled in operational use, the security of earlier life cycle stages shall be relied upon. The following assumption AE1 about the life cycle of the ICC is made (see also AE2 in the following sub-section):

(AE1.1) The security of procedures in (i) the manufacturing phase, (ii) the initialization phase and (iii) the personalization phase<sup>5</sup> of the ICC life cycle is assured.

(AE1.2) The personalization facility and the certification authority keep the confidentiality of authentication information of TOE users.

<sup>4</sup> After the third consecutive unsuccessful authentication attempt with the transport PIN, it will be blocked irreversibly

<sup>5</sup> The initialisation and the personalisation phase together are called "administration phase" (see **Table 3**)

**1.4.2. Integrity and quality of key material (AE2)**

The TOE is used in a public key infrastructure for (i) SigG digital signatures and (ii) SigG accredited technical components. The following assumption AE2 about the public key infrastructure is made:

(AE2.1) The environment ensures for the ICC authentication key pair<sup>6</sup>

- (1) the cryptographic quality of the key pair and of the cryptographic algorithms,
- (2) the confidentiality of the private key (see SK.DEPCA.CS\_AUT in [9], section 97),
- (3) authenticity of the public key (see PK.DEPCA.CS\_AUT in [9], sections 9 and 18.3) stored in the TOE.

(AE2.2) The environment shall ensure for the SigG signing key pair of the root certification authority

- (4) the cryptographic quality of the key pair and of the cryptographic algorithms,
- (5) the confidentiality of the private key (see SK.DEPCA.DS in [9], section 9),
- (6) authenticity (especially origin) of the public key (see PK.DEPCA.DS in [9], section 9).

(AE2.3) The environment ensures for the SigG signing key pair of the certification authorities

- (1) the cryptographic quality of the key pair and of the cryptographic algorithms,
- (2) the confidentiality of the private key (see SK.CA.DS in [9], section 3.2),
- (3) authenticity (especially origin) of the public key (see PK.CA.DS in [9], sections 9 and 18.3.2) in the certificate C.CA.DS.

(AE2.4) For the method of use “Generation of cardholders signing key on the ICC” the environment ensures authenticity (especially origin) of the public key (see PK.CH.DS in [9], annex D) in the certificate C.CH.DS, generated by the certification authority for SigG digital signatures.

**1.4.3. SigG compliant use of the TOE (AE3)**

The following assumptions about the SigG compliant use of the TOE are made:

(AE3.1) The TOE shall be used by the cardholder in accordance with SigG legislative. The regulations for the cardholder include at least:

- (1) The cardholder ensures secure storage and handling of the ICC to prevent misuse and manipulation of the ICC.

---

<sup>6</sup> The current version of the TOE does not support the authentication key pair.

<sup>7</sup> The use of the object in [9] is not consistent. Sometimes RCA is used instead of DEPCA and AUT instead of CS\_AUT.

## Security Target

- (2) The cardholder uses the TOE SigG signature generation function only for signing data of which the integrity or authenticity shall be assured.
  - (3) The cardholder keeps the confidentiality of all PINs and PUKs.
  - (4) The cardholder changes the PIN regularly.
  - (5) The cardholder knows whether the used IFD is (i) a public IFD or (ii) an office IFD.
  - (6) The cardholder uses the TOE only with an office IFD.
- (AE3.2) The authority, which issued the cardholder signature certificate and/or the ICC, informs the cardholder about these regulations.

### 1.4.4. Use with SigG compliant IFD (AE4)

The SigG regulations require that the TOE shall be used only with SigG compliant technical components. The bodies running the technical components are responsible for setting up and maintaining appropriate security for the SigG compliant technical components. The following assumption AE4 about the use with SigG compliant IFD is made:

- (AE4.1) The cardholder shall use the TOE's SigG application only with SigG compliant office IFDs.
- (AE4.2) The environment of the TOE ensures:
- (1) The office IFD is connected to an IT system that sends only messages or hash-values of messages to the ICC to which the cardholder wishes to apply a digital signature.
  - (2) In unlimited signature generation configuration (see section 1.3), remaining components of this IT system limit either
    - the number of signatures that can be generated after successful cardholder authentication to a fixed number. After this number of signatures has been generated, a renewal of the cardholder authentication is necessary before a new digital signature can be generated.
    - or the time within which signatures can be generated. After this time has expired, a renewal of the cardholder authentication is necessary before a new digital signature can be generated.
  - (3) The office IFD keeps the confidentiality of the cardholder's authentication information (PIN **O3** and PUK **O4**).
  - (4) The environment keeps the confidentiality and integrity of the data transferred between the office IFD and the ICC.
  - (5) If the TOE is in Current Authentication State **CAS6** (see section 3.1) and the TOE makes this transparent to the office IFD, then the office IFD reacts accordingly and makes this state transparent to the user.<sup>8</sup>

---

<sup>8</sup> This assumption is drawn from SigV, §16 Anforderungen an die technischen Komponenten, paragraph (2), sentence 5: "Sicherheitstechnische Veränderungen an den technischen Komponenten müssen für den Nutzer erkennbar werden."



## Security Target

- (6) If the maximum number of failed authentication attempts allowed for the cardholder reference data (PIN **O3**) or the cardholder reset code (PUK **O4**) has been exceeded and the TOE makes this transparent to the office IFD by generating the corresponding error code, then the office IFD reacts accordingly and makes this state transparent to the user.
- (AE4.3) If a SigG signature key pair of the cardholder is generated (by the CA/RA) then the certification authority has to verify the SigG accreditation of the ICC presented by the cardholder.

### 1.4.5. Security assumption about the ICC hardware (AE5)

The following assumptions about the ICC hardware are made:

- (AE5.1) The ICC hardware is tamper resistant. The temper resistance
- (1) protects the TOE against modification and
  - (2) ensures the confidentiality of the SigG private signature key of the cardholder and the private authentication key stored on the ICC against physical attacks.
- (AE5.2) The ICC hardware implements security mechanisms to prevent or reduce illicit information flow due to physically observable characteristics provided by the hardware design.
- (AE5.3) The ICC hardware implements mechanisms detecting and reacting to the following events:
- lower or higher clock frequency (than allowed / specified),
  - lower or higher supply voltage (than allowed / specified),
  - lower or higher temperature (than allowed / specified)
- by generating a continuous reset signal as long as the physical conditions stay out of the specified range.
- (AE5.4) The ICC hardware implements security mechanisms which
- (1) detect any physical modification of the Active Shield and
  - (2) signal that to the TOE.
- (AE5.5) The ICC hardware ensures that the private signature key does not have to be stored (temporarily) in any other place than in the key object within the EEPROM.


### 1.5. Assumed Threats

The assumed threats for the TOE are a consequence of the method of use, the environment of the TOE and the overall security policy, which is derived from the TOE's overall purpose of being technical component to generate digital signatures compliant with SigG legislative and [9]. The fundamental threat is therefore that the cardholder's signature might be generated for a piece of data the cardholder does not want to be signed (by him).

## Security Target

The threats are enumerated as T<sub>n.m</sub>, where n indicates the number of the subsection in the current section and m the number of the threat within this subsection.

The following Figure 2 depicts the resulting threat scenario assumed for the TOE. Items with a dotted borderline are forged or otherwise potentially malicious. Items with a normal borderline are "authentic".

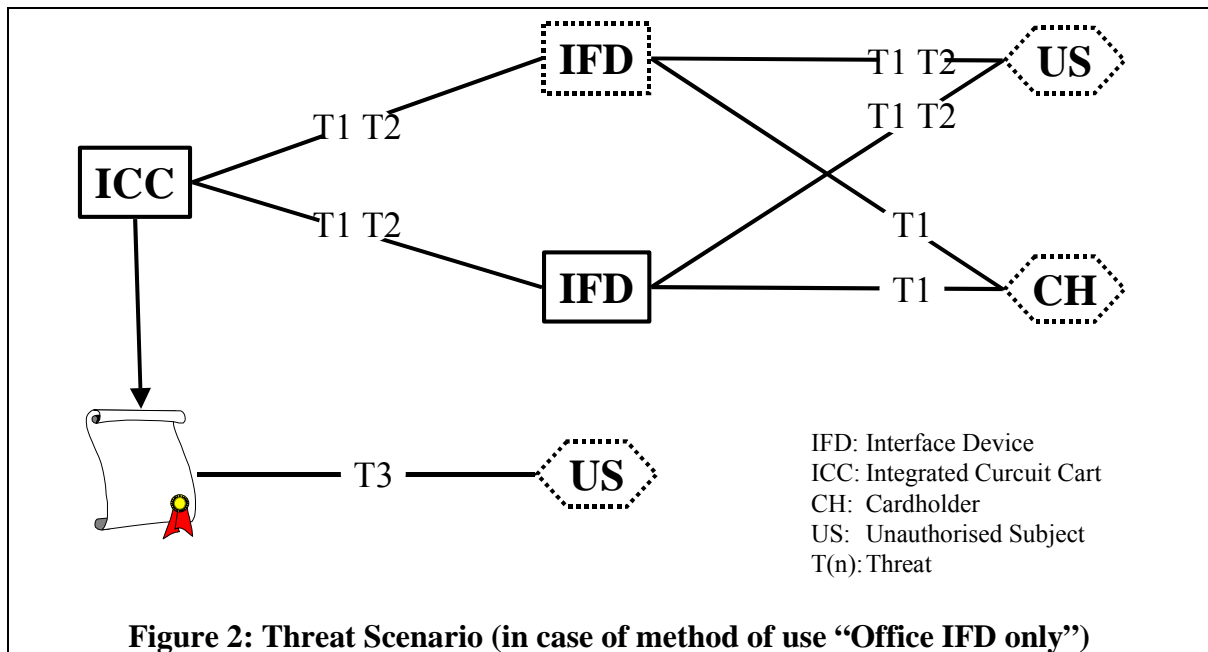

**Table 5: Security Threats**

Id	Security Threat
T1	Extraction of the cardholder's private key
T2	Misuse of the signature function
T3	Forged data ascribed to the cardholder

### 1.5.1. Extraction of the cardholder's private key (T1)

The ICC stores the SigG signing key of the cardholder in the TOE.

(T1.1) The user might try to extract the SigG signing key of the cardholder used for digital signatures from the ICC.

The extraction of the SigG private signature key of the cardholder T1.1 may be performed by (i) directly reading the key or (ii) copying the key to other devices even if the key is not generally disclosed in the process or (iii) inferring the key by analysing the results of computations performed by the ICC or (iv) inferring the key by analysing a physical observable. Successful key extraction allows an attacker to generate digital signatures ascribed to the cardholder for arbitrary data.

## Security Target

(T1.2) The user might try to modify the private key stored in the ICC.

The modification of the SigG private signature key of the cardholder T1.2 might result into a digital signature generated by the TOE, which may not be regarded as compliant to SigG legislative any more.

### 1.5.2. Misuse of the signature function (T2)

The TOE generates digital signatures of the cardholder.

(T2) Somebody might try to misuse the digital signature generation functions without permission of the cardholder.

Somebody taking possession of the ICC may try to impersonate the cardholder.

### 1.5.3. Forged data ascribed to the cardholder (T3)

A message is characterised by (i) the sender, the (ii) designated receiver and (iii) the message text. The hash-value is an image of the message text.

(T3.1) An unauthorised subject might try to modify the message text originating from the cardholder without the recipient being able to notice it.

The message of the cardholder is exposed to modifications not authorised by the cardholder. The modification of the message cannot be averted but this may be noticed by the recipient of the message.

(T3.2) An unauthorised subject might claim that a certain message text origins from the cardholder without the cardholder being able to deny that.

The message will be ascribed to the originator indicated in the message. If the message is signed by a SigG digital signature, the originator of the message will be identified as the owner of the certificate containing the public key matching the digital signature.

## 1.6. Summary of Security Features

The following Table 6 identifies the security objectives. The security objectives are enumerated as SOn.m where n indicates the number of the subsection in the current section and m the number of the security objective within this subsection. Each security objective is described later on in a respective subsection by

- stating the security objective,
- giving rationales and explaining the relationship to the security threats previously presented and
- indicating the security functionality used to achieve the security objective.

**Table 6: Security objectives**

<b>Id</b>	<b>Security Objective</b>
SO1	Prevent disclosure, copying or modification of the cardholder's private key
SO2	Prevent unauthorised use of the SigG digital signature function
SO6	Quality of key generation
SO7	Provide secure digital signatures
SO8	React to potential security violations

### **1.6.1. Prevent disclosure, copying or modification of the cardholder's private key (SO1)**

- (SO1) The TOE ensures the confidentiality and the integrity of the SigG private signature key of the cardholder stored in the TOE under two aspects:
  - (SO1.1) The TOE shall prevent any kind of extraction of the cardholder's private key from the ICC.
  - (SO1.2) The TOE shall prevent any kind of modification of the cardholder's private key in the ICC.

The cardholder intends to protect the integrity of his message while it transits (either over space or time) to the intended recipient. It is the TOE's principal function to generate digital signatures for data provided by the IFD and related to the message text. The signature enables the recipient to verify the origin and the integrity of the message text. The effectiveness of the digital signature mechanisms is based on the confidentiality and integrity of the cardholder's private key. The TOE is intended to be used within the context of SigG legislative, which is strict about the confidentiality: the key must never leave the signature device and must not be disclosed when used (see [7] §15 (1) Sentence 2).

This security objective covers threat T1.1 and T1.2 defined in section 1.5.1.

## Security Target

The TOE shall implement the security enforcing function AC1 and AC2 described in sections 2.2.2 and 2.3.2 to fulfil the security objective SO1. The SEF OR1 described in sections 2.2.4 and 0 shall prevent illicit information flow between the SigG application and other application embedded on the ICC through temporarily used storage areas. The SEF DX1 and DX2 described in section 2.2.5 and 2.3.5 shall prevent disclosing of the SigG private signature key of the cardholder in the digital signatures generated by the TOE. The secure blocking state of the TOE shall ensure the security of the SigG private signature key of the cardholder if a potential attack was detected (see SEF AC3 and AU1 in sections 2.2.2, 2.2.3, 2.3.2 and 2.3.3).

### 1.6.2. Prevent unauthorised use of the SigG digital signature function (SO2)

- (SO2) The TOE shall allow the use of the digital signature function only to the cardholder. This security objective has the following aspects<sup>9</sup>:
  - (SO2.1) The TOE shall allow the use of the digital signature function only to the cardholder after successful authentication by knowledge.
  - (SO2.2) Successive authentication failures will be interpreted as an attempted unauthorised access by the TOE and will disable the signature function.
  - (SO2.3) The authentication data are stored in the TOE and shall not be disclosed.

This security objective counters the threat T2 (section 1.5.2).

To use the SigG application the cardholder has to authenticate by knowledge (by presenting a PIN).

The TOE implements the security enforcing functions IA1, IA2, IA3 and IA4 as well as AC1 described in sections 2.2.1, 2.3.1, 2.2.2 and 2.3.2 to fulfil the security objective SO2. Authentication failures are being made apparent to the cardholder through the security enforcing function AU1 described in section 2.2.3. The **secure blocking state**<sup>10</sup> of the TOE shall ensure the security of the SigG signature function if a *potential security violation* (see (SO8.1) below) has been detected (see SEF AC3 and AU1 in sections 2.2.2, 2.2.3, 2.3.2 and 2.3.3).

### 1.6.3. Quality of key generation (SO6)

The TOE shall fulfil the following security objective concerning the quality of key material generated by the TOE:

- (SO6) Any key material generated by the TOE shall bear a strong cryptographic quality. The cryptographic quality is characterised as follows:

---

<sup>9</sup> The security objective SO2 corresponds to [7] §15 (1) Sentence 1 and 3 and (2) 1. a) and b), requiring authentication of the cardholder for access to functions using the SigG private signature key of the cardholder.

<sup>10</sup> See Glossary for the definition.

## Security Target

- (1) If private keys are generated either in the personalization phase or in operational use phase by means of the TOE then this process shall be performed in a confidential way.
- (2) The private keys generated by the TOE shall be unique with a very high probability and cryptographically strong.
- (3) It shall be impossible to calculate the private key from the public key.

The key pair shall be generated by appropriate algorithms and parameters according to [7] Anlage 1, Abschnitt I Nr. 2 (see [9]). The cryptographic quality for the ICC device authentication key pair is necessary to ensure the cryptographic strength of the mutual device authentication, see [9].

The security objective SO6 counters the threat T3 ensuring a precondition<sup>11</sup> for the cryptographic strength of the digital signature (see also [8]).

The TOE implements the security enforcing function DX1 described in sections 2.2.5 and 2.3.5 to fulfil the security objective SO6 by means of generation of secure SigG signature key pairs. The appropriate reaction of the TOE shall prevent misuse of this SEF if a potential attack has been detected (see SEF AC3 in section 2.2.2).

### 1.6.4. Provide secure digital signatures (SO7)

The principal security objective of the TOE is the generation of secure SigG digital signatures (SO7)<sup>12</sup>.

- (SO7.1) The TOE provides a function to generate a SigG digital signature for the data presented by the IFD using the SigG private signature key of the cardholder stored in the TOE.
- (SO7.2) The function to generate a SigG digital signature works in a manner that other individuals not possessing the SigG private signature key of the cardholder cannot generate the signature.

In general SO7.2 relates to a cryptanalytic attack against a signed message independently of the TOE and addresses the cryptographic strength of the signing function of the TOE (see [8]).

The data presented by the IFD and to be signed are (i) the hash-value of the message text or (ii) the complete message text to be hashed by the TOE (see [9], section 14).

This is the principal security objective of the TOE directly countering the threat T3.

The TOE implements the security enforcing function DX2 described in sections 2.2.5 and 2.3.5 to fulfil the security objective SO7 generating secure digital signatures. The

---

<sup>11</sup> Cryptographically weak key material involves danger for the strength of the digital signature.

<sup>12</sup> The security objective SO7 is drawn from [7] §15 (1) Sentence 4. The requirement of [7] §15 (1) Sentence 4 that the cardholder's secret key cannot be derived from the signature is a sub-case of SO1.1 because the signature is a part of the TOE's output.

## Security Target

appropriate reaction of the TOE shall ensure the security of SigG signature generation if a potential attack was detected (see SEF AC3 and AU1 in sections 2.2.2, 2.2.3, 2.3.2 and 2.3.3).

### 1.6.5. React to potential security violations (SO8)

The TOE fulfils the following security objective SO8<sup>13</sup>:

(SO8.1) The TOE detects a potential security violation, which is identified by the TOE itself.

For this TOE, a **potential security violation** is defined in the following way:

Somebody is trying to use the TOE when a potential security violation flag is set (see Glossary).

(SO8.2) If a potential security violation is detected then

- (1) the TOE has already reached a *secure blocking state* (see Glossary) by
  - (i) disabling all functionalities of the SigG Application (security violation flag A is set)<sup>14</sup> or
  - (ii) disabling all functionalities of the ICC, with the exception of sending the ATR and the command “Get Data”.
- (2) the secure blocking state is made apparent to the user. The blocked TOE will send an appropriate Return Code to the IFD.

The security objective SO8 counters the threats T1 to T3 in case of detected potential security violation

The TOE implements the security enforcing functions IA1.3, AC3 and AU1 described in sections 2.2.1, 2.3.1, 2.2.2, 2.2.3, 2.3.2 and 2.3.3 to fulfil the security objective SO8.

SO8 is fulfilled independently from and complements (AE5.3). If the ICC hardware detects any abnormal physical condition and prevents the execution of the TOE by the reset signal (see (AE5.3)(1)), then the SO8 is also fulfilled because this is a secure state of the ICC discernible by the cardholder.

---

<sup>13</sup> The security objective SO8 is drawn from [7] §15 (4).

<sup>14</sup> Only the command Get Data is still executable referring to the DF<sub>SigG</sub>

## 2. Security Functions

### 2.1. Definitions and Global Substitutions

**Note:** The names of processes, objects, access-types and security-relevant-events will be presented in **bold face** in a chapter when introduced and explained for the first time. They are printed *italic* when referred to outside of tables to point out the keywords to the reader. The definitions of the terms are collected in the glossary (see section 8).

#### 2.1.1. Subjects

The IFD presents as technical process the outside world beyond the interface of the ICC and thus the TOE. The IFD is generally expected to access data and services of the ICC on behalf of and as intended by the human user. Moreover the IT-system used by the human user acts on behalf of and as intended by the human user. In the point of view of the TOE's security policy the outside world is a combination of two types of subjects: (i) the human users and (ii) the IT-systems. The subjects **S1** Cardholder, **S2** Somebody and **S7** Potential attacker represent human users. The subject **S3** IFD represents an IT system. The outside world is represented by a pair  $(u, t) \in \{S1, S2, S7\} \times \{S3\}$ . The term "Anybody" is introduced for the set of the two subjects S1 and S2 to make some descriptions easy.

The TOE is aware of the subjects identified in the following table.

**Table 7: Subjects**

<b>Id</b>	<b>Subject</b>
<b>S1</b>	Cardholder
<b>S2</b>	Somebody
<b>S3</b>	IFD
<b>S7</b>	Potential attacker

#### *Subject S1 Cardholder*

In the operational phase the **subject S1 Cardholder** is a human user, for whom the SigG application of the TOE is personalised.

The cardholder is the only person in legitimate possession of the verification data (PIN and PUK) matching the reference data stored for authentication by knowledge for the SigG application of the TOE in the operational phase (see (AE3.1)).

The cardholder is the legitimate owner of a specific ICC running the TOE and of the SigG signature key pair of the cardholder stored in the TOE.

#### *Subject S2 Somebody*

The **subject S2 Somebody** is any human user of the ICC different from the subject **S1** Cardholder and **S7** Potential attacker, i.e. (i) not being in legitimate possession of the



## Security Target

verification data (PIN and PUK) defined for the cardholder<sup>15</sup> and (ii) using the TOE not being in the secure blocking state. The subject **S2** may be in legitimate possession of other verification data or be able to provide the biometrical characteristics to generate such authentication data for a non-SigG application on the ICC.

### **Subject S3 IFD**

The **subject S3 IFD** is an interface device connected to the ICC, which (i) doesn't have initiated mutual device authentication according to [9], section 18, or (ii) is not a SigG accredited IFD (see definition in the glossary, section 8). The subject **S3 IFD** may be an office IFD or an arbitrary public IFD connected to the ICC.

### **Subject S7 Potential attacker**

The **subject S7 Potential attacker** is an arbitrary subject (among others a human user) trying to use the TOE in the secure blocking state (e.g. after a potential security violation is detected, see SO8, **CAS6** and **SRE10** for details).

### **2.1.2. Security-relevant-events**

A security-relevant-event depends on (i) commands presented by the IFD to the TOE, (ii) command data presented by the IFD to the TOE, (iii) data concerning security relevant events persistently stored in TOE and (iv) events signalled by the ICC hardware to the TOE (see AE5).

The security-relevant-events given in the following Table 8 are recognised by the TOE.

**Table 8: Security-relevant-events**

<b>Id</b>	<b>Security-relevant-event</b>
<b>SRE1</b>	Resetting of the ICC
<b>SRE2</b>	Deactivation of the ICC
<b>SRE3</b>	Opening of the SigG application
<b>SRE4</b>	Closing of the SigG application
<b>SRE5</b>	Successful cardholder authentication
<b>SRE6</b>	Cardholder authentication failure
<b>SRE7</b>	Repeated authentication failure
<b>SRE8</b>	Authentication expiration
<b>SRE10</b>	Potential security violation occurred
<b>SRE11</b>	Cardholder authenticated by reset code
<b>SRE12</b>	Cardholder authentication by reset code failed

<sup>15</sup> i.e. the authentication data that Somebody **S2** will provide to the TOE will not match the reference data stored in the TOE.

### ***Security-relevant-event SRE1 Resetting of the ICC***

The **SRE1 “Resetting of the ICC”** is defined as security relevant event when the (i) ICC is powered up by inserting the ICC into a suitable IFD (“activation”) or (ii) a hardware reset signal is given to the ICC. The TOE performs a well-defined start-up procedure (“card reset”) without intervention of the user or the IFD.

### ***Security-relevant-event SRE2 Deactivation of the ICC***

The security relevant event **SRE2 “Deactivation of the ICC”** occurs if the power supply of the ICC is cut off as by removal from the IFD. After **SRE2** all non-persistent information of the TOE (not stored in the EEPROM or ROM) is lost.

### ***Security-relevant-event SRE3 Opening of the SigG application***

The security relevant event **SRE3 “Opening of the SigG application”** occurs if (i) no file (EF or DF) of the SigG application has been selected before and (ii) a file in the SigG application (an elementary file (EF) in the SigG application directory or the SigG application directory (DF) itself) is selected.

Note: if the SigG application is already open, then the selection of a file in the SigG application will not cause the security relevant event **SRE3**<sup>16</sup>. The security relevant event **SRE3** is refined in section 3.1 into **SRE3a** and **SRE3b** (depending on the value of RC-PIN).

### ***Security-relevant-event SRE4 Closing of the SigG application***

The security relevant event **SRE4 “Closing of the SigG application”** occurs if (i) an elementary (EF) file outside the SigG application is selected or (ii) an application directory (DF) different from the SigG application directory is selected.

### ***Security-relevant-event SRE5 Successful cardholder authentication***

The security relevant event **SRE5 “Successful cardholder authentication”** occurs if (i) the authentication of a human user for the SigG application with the verification data was attempted, (ii) the number of consecutive failed authentication attempts with verification data does not exceed the maximum number of failed authentication attempts allowed and (iii) the verification data presented for human user authentication match the reference data **O3** stored for the SigG application of the TOE in the operational phase. Since the TOE supports only user authentication by knowledge for the SigG application, condition (iii) is fulfilled if and only if the verification data presented match the reference data for knowledge based authentication. If **SRE5** occurs, the number of consecutive failed authentication attempts with reference data is set to zero (i.e. RC-PIN is set to its initial value, RC-PIN:=3).

For the user authentication by knowledge the cardholder presents his verification data (PIN) to the TOE. The PIN retry counter RC-PIN has the initial value 3, so that there are

---

<sup>16</sup> This especially means that an already authenticated cardholder will not lose this security state since the CAS will not be changed.

## Security Target

three successive attempts to input the PIN. A successful attempt (i) resets the retry counter and (ii) authenticates the cardholder (**SRE5**).

### *Security-relevant-event SRE6 Cardholder authentication failure*

The security relevant event **SRE6 “Cardholder authentication failure”** occurs if (i) the authentication of a human user for the SigG application with the verification data was attempted and (ii) **SRE5** does not occur and (iii) the maximum number of allowed consecutive failed authentication attempts with reference data is not exceeded ( $RC-PIN > 0$ ). If **SRE6** occurs, the number of authentication attempts with reference data remaining is decreased by one.

### *Security-relevant-event SRE7 Repeated authentication failure*

The security relevant event **SRE7 “Repeated authentication failure”** occurs if (i) the authentication of a human user for the SigG application with verification data was attempted, (ii) **SRE5** does not occur and (iii) the retry of the human user authentication for the SigG application is not allowed anymore ( $PIN\ retry\ counter\ RC-PIN:=0$ ).

If the **SRE7** has occurred then the cardholder can reset the PIN retry counter RC-PIN and input a new PIN using the cardholder reset code **O4** (PUK), see **SRE11**. The PUK retry counter RC-PUK also has the initial value 3, so that there are three successive attempts to input the PUK. A successful attempt (i) resets the PUK retry counter RC-PUK to its initial value, (ii) resets the PIN retry counter RC-PIN to its initial value and (iii) authenticates the cardholder by reset code (**SRE11**)<sup>17</sup>.

Note: If the retry counter for PUK **O4** reaches the value 0 ( $RC-PUK = 0$ ), the cardholder authentication for the SigG application is permanently blocked and, thus, the TOE is in the secure blocking state (see also (SO2.2) and (SO8.1), (SO8.2)). The current value of the RC-PIN is not significant.

### *Security-relevant-event SRE8 Authentication expiration*

The security relevant event **SRE8 “Authentication expiration”** occurs

(case\_one): if a digital signature has been generated (not configurable by the cardholder) or

(case\_n): if the following event occurs according to the configuration selected by the card manufacturer<sup>18</sup>

$n$  digital signatures have been generated, where  $n \geq 1$  and  $\leq 255$ .

If the card manufacturer has personalized the card with an ARA Counter = 0 for the PIN, which means an unlimited usage of the granted access right, then it is possible to generate an unlimited number of signatures (only for Trust Center use).

<sup>17</sup> this authentication by reset code does not allow to generate a digital signature, but only to change the PIN.

<sup>18</sup> configurable in ARA Counter of PIN

### *Security-relevant-event SRE10 Potential security violation occurred*

The following events cause the security relevant event **SRE10 “Potential security violation occurred”** to be triggered:

- (1) The retry of the authentication for unblocking and changing of PIN (**SRE11**) by presenting the reset code (PUK) is not allowed any longer (RC-PUK has been decremented and equals zero, in short: “RC-PUK reaches 0”). Moreover, an opening of the DF<sub>SigG</sub> is not possible any more, because the **Potential security violation flag A** is set in the header of the DF<sub>SigG</sub>. This flag will be automatically set, if the RC-PUK reaches 0 (RC-PIN can be zero or greater than zero).
- (2) A signal provided by the underlying hardware indicates a modification of the active shield and the TOE sets the **Potential security violation flag B** (see (AE5.4) for further details).
- (3) After the ICC is powered up or a hardware reset signal is given to the ICC the TOE detects that the **Potential security violation flag B** is set.

### *Security-relevant-event SRE11 Cardholder authenticated for PIN unblocking and changing by reset code*

The security relevant event **SRE11 “Cardholder authenticated for PIN unblocking and changing by reset code”** occurs if (i) the authentication for the PIN unblocking and changing by the reset code (PUK) of the SigG application has been attempted, (ii) the human user authentication for the SigG application by presenting the reset code is allowed (RC-PUK>0) and (iii) the reset code presented matches the stored reset code **O4** (PUK) of the SigG application of the TOE.

The authentication of the cardholder **S1** presenting verification data matching the **O4** SigG cardholder reset code (PUK) (i) will reset the retry counters RC-PIN and RC-PUK (for PIN as well as for PUK)<sup>19</sup> and (ii) will change the cardholder reference data (PIN) **O3** (see IA4 in section 2.2.1 and 2.3.1). The authentication by reset code allows only to change the PIN, but does not allow to generate digital signatures.

### *Security-relevant-event SRE12 Authentication for PIN unblocking and changing by reset code failed*

The security relevant event **SRE12 “Authentication for PIN unblocking and changing by reset code failed”** occurs if (i) the authentication with the SigG cardholder reset code has been attempted, (ii) the presented reset code does not match the reset code **O4** “SigG cardholder reset code” stored in the TOE and (iii) the retry of authentication for PIN unblocking and changing by reset code is still allowed (RC-PUK > 0).

Note that the **SRE10** “Potential security violation occurred” represents the repeated failure of authentication attempts by reset code (PUK) if the retry of the human user

---

<sup>19</sup> i.e. it will unblock the PIN

## Security Target

authentication by presenting the reset code (PUK) is not allowed any longer (RC-PUK reaches 0).

### 2.1.3. Substitutions for the placeholders "object" and "access-types"

The following objects and related access-types are identified (see Table 9) and used to replace the respective placeholders within the claims section 2.3.

**Table 9: Objects and related access-types**

<b>Id</b>	<b>Object</b>	<b>access-types</b>
<b>O1</b>	SigG application	open, close
<b>O2</b>	SigG private signature key of the cardholder (SK.CH.DS)	generate, use for signature generation, extract
<b>O3</b>	SigG cardholder reference data (PIN)	use for cardholder authentication, modify, block, unblock
<b>O4</b>	SigG cardholder reference reset code (PUK)	use for authentication, block
<b>O5</b>	SigG signature key certificate of the cardholder (C.CH.DS)	read, modify
<b>O6</b>	SigG public key of the root certification authority (PK.RCA.DS) <sup>20</sup>	read, modify
<b>O12</b>	SigG public key of the cardholder (PK.CH.DS)	read, modify, generate

#### *Object O1 SigG application*

The object **O1 SigG application** includes SigG related data objects as specified in Table 9 and any function or method to access or use that data.

The term "open" the **O1** means to enable the access-types to the contained objects, which are not available otherwise. No other function or data not being related to the SigG application is available in an open SigG application.

The term "close" the **O1** means to disable these access-types and gives way to other not SigG related activities.

The **O1** is always implicitly closed immediately after resetting the TOE.

#### *Object O2 SigG private signature key of the cardholder*

The object **O2 SigG private signature key of the cardholder** is part of the object **O1** and is used by the TOE to generate a digital signature on behalf of the cardholder. This object is named SK.CH.DS in [9].

The term "generate" of the **O2** means the generation of a SigG key pair of the cardholder on the ICC and storing the SigG private signature key of the cardholder in the TOE. The access type "generate" is applicable only in the administration phase.

<sup>20</sup> This public key is wrapped in the corresponding certificate

## Security Target

The term “**use for signature generation**” of the **O2** means calling and performing of the respective command to generate a digital signature. Only such SigG signing key pair can be used for signature generation that has already been generated.

The term “**extract**” to the **O2** means (i) to use the key for any other function beside signature generation (in sense of refer) and (ii) any kind of gathering information about the **O2** by observing the TOE’s external behaviour during the computation of a digital signature (e.g. electromagnetic emanation, power consumption and timing, in sense of infer).

### *Object O3 SigG cardholder reference data*

The object **O3 SigG cardholder reference data** is the data permanently stored in the TOE to verify the verification data provided for the cardholder authentication.

The term “**use for cardholder authentication**” the **O3** means to call a service, which provides human user authentication by comparing the **O3** with the verification data presented (see IA1 in sections 2.2.1 and 2.3.1).

The term “**modify**” the SigG cardholder reference data means (i) to authenticate with the verification data for the current reference data and (ii) if this cardholder authentication was successful to change the value of **O3** to the new reference data presented.

The term “**block**” the **O3** means to deactivate **O3** for the use for cardholder authentication through repeated authentication failure (see **SRE7**).

The term “**unblock**” the **O3** means (i) to perform cardholder authentication by reset code (PUK **O4**) and (ii) if this cardholder authentication was successful to change the value of **O3** to the new reference data presented.

### *Object O4 SigG cardholder reference reset code*

The object **O4 SigG cardholder reset code** (PUK) is the data permanently stored in the TOE and used to verify the reset code provided for the unblocking and changing of the reference data (PIN).

The term “**use for authentication**” the **O4** means to call the service (see mechanism 4.4), which (i) compares the **O4** (PUK) with the reset code presented (see IA1 in sections 2.2.1 and 2.3.1) and if it matches (ii) allows to unblock and change **O3** (PIN) (see IA4 in section 2.2.1 and 2.3.1).

Note that an authentication with **O4** allows only to unblock and change **O3**, but does not authenticate the cardholder for the generation of digital signatures, i.e. after entering the correct PUK **O4** it is not possible to generate a digital signature.

The term “**block**” the **O4** means to deactivate **O4** for the use for authentication through failure of authentication by reset code, if the retry of the authentication by reset code is not allowed any more (RC-PUK reaches 0, see **SRE10**). This triggers the secure blocking state of the TOE.

Note: PIN (**O3**) and PUK (**O4**) are used for the SigG application only. If other applications are installed on the ICC as well, they may or may not have their own, independent PIN and/or PUK.

***Object O5 SigG signature key certificate of the cardholder***

The object **O5 SigG signature key certificate of the cardholder** is a certificate of the SigG public key PK.CH.DS of the cardholder for the signing algorithm supported by the TOE (RSA), which is stored in the TOE and may be used by an external party to verify the cardholder's signatures. This object is named C.CH.DS in [9].

The term “**read**” means to export the object **O5** to the IFD.

The term “**modify**” means to change the stored value of **O5**. The access type modify is applicable only in the administration phase.

***Object O6 SigG public key of the root certification authority***

The object **O6 SigG public key of the root certification authority** is a public key of the root certification authority for the signing algorithm supported by the TOE, which is stored in the TOE wrapped in the certificate C.RCA.DS and may be used by an external party. This object **O6** is named PK.RCA.DS in [9].

The term “**read**” means to export the object **O6** to the IFD.

The term “**modify**” means to change the stored value of **O6**. The access type modify is applicable only in the administration phase.

***Object O12 SigG public key of the cardholder***

The **object O12 SigG public key of the cardholder** can be used by an external party to verify the digital signature of the cardholder. This object is named PK.CH.DS in [9]. The term “**read**” the **O12** means the use of the respective command of the TOE to transmit the object **O12** to the IFD.

The term “**generate**” the **O12** means the generation of a SigG key pair of the cardholder on the ICC and storing the SigG public signature key of the cardholder in the TOE. The access type generate is applicable only in the administration phase.

The term “**modify**” means to change the stored value of **O12**. The access type modify is applicable neither in the administration nor in the operational phase.

**2.2. Informal Description****2.2.1. Identification and Authentication*****IA1 Authentication of human user***

The SEF IA1 contains three sub-functions: IA1.1, IA1.2 and IA1.3

- (1) SEF IA1.1 authenticates the **S1** “Cardholder”,
- (2) SEF IA1.2 assumes the default identity **S2** “Somebody”,
- (3) SEF IA1.3 detects the **S7** “Potential attacker”.

## Security Target

The TOE will contain an authentication function SEF IA1.1 that detects the **S1** “Cardholder” in two different ways:

- (a) The SEF **IA1.1.1** allows a subject S2 “Somebody” to authenticate himself as S1 “Cardholder” for the SigG application presenting the verification data. If the number of consecutive failed authentication attempts with reference data does not exceed the maximum number of allowed failed authentication attempts, the SEF IA1.1.1 will verify the verification data by means of O3 “SigG cardholder reference data” using the mechanism defined in paragraph 4.1. If the number of consecutive failed authentication attempts with reference data exceeds the maximum number of allowed failed authentication attempts (RC-PIN=0), the authentication attempt fails (independently of the presented verification data). If RC-PIN>0 and the presented verification data match the O3, the authentication attempt is successful. Successful authentication of the cardholder is defined as SRE5 “Successful cardholder authentication”. A failure of the authentication attempt as cardholder causes (see SEF IA3) either (i) SRE6 “cardholder authentication failure” if the maximum number of allowed consecutive failed authentication attempts with reference data is not yet exceeded (RC-PIN>0) or (ii) SRE7 “Repeated authentication failure”, if the maximum number of allowed consecutive failed authentication attempts with reference data is exceeded (RC-PIN=0). The SEF IA1.1.1 uses the mechanism M1 described in section 4.1.
- (b) The SEF **IA1.1.2** allows a subject S2 “Somebody” to authenticate himself for PIN change for the SigG application presenting data as reset code. This means that after successful authentication with PUK (O4), the subject S2 “Somebody” is granted the right to change the PIN (O3), but not the right to generate a digital signature. If the retry of authentication by presenting the reset code is allowed (RC-PUK>0), then the presented data are verified by means of O4 “SigG cardholder reset code”. If the presented data match O4 then this will be interpreted as SRE11 “Cardholder authenticated by reset code”. If the presented data do not match O4 then this will be interpreted as SRE12 “Cardholder authentication by reset code failed”. If the presented data do not match O4 and the number of consecutive failed authentication attempts with reference data exceeds the maximum number of allowed failed authentication attempts this will be interpreted as the **SRE10** “Potential security violation occurred” (see SEF IA3). The SEF IA1.1.2 uses the mechanism M4 described in section 4.4.

SEF **IA1.2**: The TOE assumes for the SigG application the default identity of the human user **S2** “Somebody” after the following SREs: **SRE1** “Resetting of the ICC”, **SRE2** “Deactivation of the ICC”, **SRE3** “Opening of the SigG application”, **SRE4** “Closing of the SigG application”, **SRE6** “Cardholder authentication failure”, **SRE7** “Repeated authentication failure”, **SRE8** “Authentication expiration”<sup>21</sup>. This SEF IA1.2 uses the mechanism M1 defined in paragraph 4.1.

---

<sup>21</sup> therefore the PIN must be in DF\_DinSig



## Security Target

SEF **IA1.3**: After **SRE10** “Potential security violation occurred”, the TOE will assume the **S7** Potential attacker as the human user of the TOE. This SEF IA1.3 uses the mechanism M1 defined in paragraph 4.1.

### **IA2 Changing reference data**

The TOE will contain an authentication function SEF IA2 that permits the **S1** “Cardholder” to change his or her **O3** “SigG cardholder reference data”. The cardholder changes the reference data by means of SEF IA2 (i) presenting the verification data matching the stored **O3** (PIN) and (ii) defining the new **O3** using the mechanism M2 defined in paragraph 4.2. The SEF IA2 permits the change of SigG cardholder reference data only after successful authentication of the cardholder defined as SRE5 “Successful cardholder authentication”. A failure of the authentication attempt as the cardholder causes either (i) SRE6 “cardholder authentication failure” if the maximum number of allowed consecutive failed authentication attempts with reference data is not exceeded (RC-PIN>0) or (ii) SRE7 “Repeated authentication failure” if the maximum number of allowed consecutive failed authentication attempts with reference data is exceeded (RC-PIN=0).

### **IA3 Blocking the reference data**

The SEF IA3 counts the consecutive failed authentication attempts and prevents the subjects **S1** “Cardholder” and **S2** “Somebody” from using the object **O3** “SigG cardholder reference data” if the maximum number of allowed consecutive failed authentication attempts with reference data is exceeded (e. g. **SRE7** has occurred, RC-PIN=0). If **SRE7** has occurred, the SEF IA3 will reject the authentication attempt independent of whether the presented data match O3 or not. The SEF IA3 uses the mechanism M3 defined in paragraph 4.3.

### **IA4 Unblocking and changing the reference data (Reset Retry Counter)**

After successful “*authentication for PIN unblock and change*” with the **O4** “Reset code of the cardholder” (PUK) the SEF IA4 permits (i) to unblock the SigG cardholder reference data **O3** and (ii) to modify **O3** (PIN) using the mechanism M4 defined in paragraph 4.4. The successful *authentication for PIN unblock and change* with the reset code is defined as **SRE11** “Cardholder authenticated by reset code”. A failure of the authentication attempt by reset code (PUK) causes **SRE12** “Cardholder authentication by reset code failed”<sup>22</sup> or **SRE10** “Potential security violation occurred”<sup>23</sup>. The SEF IA4 uses the mechanism M4.

## **2.2.2. Access Control**

### **AC1 Access control of commands**

SEF AC1 will control the access of the subjects **S1**, **S2** and **S7** representing a human user.

The SEF AC1 will *permit* that the subjects *s* access the object *o* by the access-type  $acy(s,o)$  defined in the **Table 10**.

---

<sup>22</sup> if RC-PUK > 0

<sup>23</sup> if RC-PUK = 0

## Security Target

The SEF AC1 will **prevent** that the subjects *s* access the object *o* by the access-type  $acn(s,o)$  defined in the **Table 11**.<sup>24</sup>

The SEF AC1 uses the mechanism M6 defined in paragraph 4.6.

Note that these access-sets concern a requested access and do not guarantee the possibility of an access request. This does not contradict the security policy because the reliability of service is not a security objective of the TOE.

The underlying security policy permits to open and to close the SigG application in the **CAS6** because the TOE may still be partly operational in **CAS6** (see **SRE10**).

Note that these access-sets are defined for the **operational phase only**. The TOE will detect the subject **S7** “Potential attacker” if the TOE is in the **Blocking state of the TOE**. The access-type “*extract*” is prevented by **AC2** for all subjects and, hence, not mentioned here. This security target does not cover the privileged IFD authenticated with RoleID=02 defined in [9], annex C. Therefore the TOE does not allow to *modify* or *supplement* the objects **O5**, **O6**.

**Table 10: Access-set  $acy(s,o)$  of SEF AC1**

	Object	<b>S1</b> Cardholder	<b>S2</b> Somebody	<b>S7</b> Potential attacker
<b>O1</b>	SigG application	open, close	open, close	close <sup>25</sup>
<b>O2</b>	SigG private signature key of the cardholder	use for signature generation		
<b>O3</b>	SigG cardholder reference data	use for cardholder authentication, modify, block, unblock	use for cardholder authentication, block	
<b>O4</b>	SigG cardholder reset code	use for authentication, block	use for authentication, block	
<b>O5</b>	SigG signature key certificate of the cardholder	read	read	
<b>O6</b>	SigG public key of the root certification authority	read	read	
<b>O12</b>	SigG public key of the cardholder	read	read	

**Table 11: Access-set  $acn(o,s)$  of SEF AC1**

<sup>24</sup>  $acy()$  and  $acn()$  mean access yes and access no, respectively

<sup>25</sup> Only if the potential security violations flag A is set

## Security Target

Object		S1 Cardholder	S2 Somebody	S7 Potential attacker
<b>O1</b>	SigG application			open
<b>O2</b>	SigG private signature key of the cardholder	generate	generate, use for signature generation	generate, use for signature generation
<b>O3</b>	SigG cardholder reference data		modify, unblock	use for cardholder authentication, modify, block, unblock
<b>O4</b>	SigG cardholder reset code			use for authentication, block
<b>O5</b>	SigG signature key certificate of the cardholder	modify	modify	read, modify
<b>O6</b>	SigG public key of the root certification authority	modify	modify	read, modify
<b>O12</b>	SigG public key of the cardholder	modify, generate	modify, generate	modify, generate, read

### ***AC2 Access control of extraction***

The SEF AC2 will prevent the extraction of the SigG private signature key SK.CH.DS (**O2**) of the cardholder. The SEF AC2 uses the mechanism M5 defined in paragraph 4.5.

The cardholder may use his private signing key for generation of digital signatures performed by the TOE.

In order to prevent any disclosure or modification of the cardholder's private key the TOE never allows any access to that data except for its implicit use within the TOE's security functions as specified by those functions. This also includes the prevention of any sort of inference of the private key by observing the TOE's behaviour during the generating of a digital signature.

The TOE doesn't provide any command that could be used to select and to read a key-record. The SigG private signature key SK.CH.DS is only used implicitly.

The corresponding modules for signature generation are implemented in a way which is resistant against all known attacks: The RSA algorithm which is used for signature generation is implemented in a DPA- and SPA-resistant way; and the SigG private signature key (O2) is protected against DFA (Differential Fault Analysis, "Bellcore-Attack"). (see M5).

### ***AC3 Secure blocking state***

The Secure Blocking State occurs, if one of the potential security violation flags is set.

These flags prevent the object **O1** from being opened. The SEF AC3 uses the mechanism M7 defined in paragraph 4.7.

### **2.2.3. Audit**

#### ***AU1 Information about secure blocking state***

The SEF AU1 will inform the human user about the secure blocking state of the TOE by means of a blocking information.

The appropriate Return Code will be generated by the TOE if it is in the Secure Blocking State (if **SRE10** has occurred).

The SEF AU1 uses the mechanism M7 defined in paragraph 4.7.

Note that, according to (AE4.2)-(5) the SigG compliant IFD shall inform the cardholder about the secure blocking state of the TOE.

### **2.2.4. Object Reuse**

The SEF OR1 ensures that sensitive data (PIN, PUK and SK.CH.DS (O2)) will not remain in temporary used storage areas and be read accidentally by another application or by Somebody S2.

OR1.1 The values of PIN and PUK, which have been entered by the user, will immediately be actively erased from the RAM or XRAM areas after their use.

OR1.2 The TOE does not store the SK.CH.DS (O2) in any other place than in the key object within the EEPROM.

The SEF OR1 will use the mechanism M9 defined in paragraph 4.8.

### **2.2.5. Data Exchange**

#### ***DX1 Key Generation***

The SEF DX1 generates the cardholder's signature key pair on the ICC. The cardholder's signature key pair consists of the SigG private signature key SK.CH.DS of the cardholder (**O2**) and the SigG public signature key PK.CH.DS of the cardholder (**O12**). During the key-generation the key-header and the key-body are written, where the key-header specifies the attributes of the key, including its allowed usage (digital signature creation), the algorithm (RSA) and the modulus length of the key pair (1024 bit). This SEF DX1 shall be used only in the personalization phase; the cardholder cannot generate any key pair.

The security requirements arise from the operational usage of the TOE. This also leads to requirements on the TOE's functionality "Generation of a SigG signing key pair", which

## Security Target

has an essential effect on the secure operation of the TOE in the operational usage phase. On the other hand the security enforcing function DX1 is used per definitionem only in a personalization phase (see sec. 1.3). The SEF DX1 implements the security objective **SO6** and has an essential effect on the secure operation of the TOE in the operational phase. Because of that the inclusion of the SEF DX1 into Security Target is easily to justify.

The SEF DX1 will use the mechanism M10 defined in paragraph 4.9.

### ***DX2 Digital signature generation***

The cardholder generates a SigG compliant digital signature by means of the SEF DX2 using SigG private signature key (SK.CH.DS). The SEF DX2 receives the data to be signed from the IFD and returns the signature of these data to the IFD. Only the cardholder is allowed to execute SEF DX2 (DX2 can only be executed after successful cardholder authentication by PIN **SRE5**; after successful cardholder authentication by PUK **SRE11** it is not possible to use SEF DX2). The TOE allows to generate

(case\_one) only one digital signature (after this signature has been generated, SRE8 “Authentication expiration” occurs) or

(case\_n) a configurable number *n* of digital signatures (where *n* can be  $\geq 1$  and  $\leq 255$  or unlimited)

Witch case is implemented for a concrete issue of the TOE is defined only by the card manufacturer in the administrative phase and cannot be changed in the operational phase (see also the definition of SRE8 in section 2.1.2 for these two cases ).

The TOE supports two ways of hashing the message to be signed: The IT system (i) transforms the message text into the hash-value and transmits the hash-value to the TOE or (ii) transmits the complete message text to be hashed by the TOE.

SEF DX2 will use the mechanism M11.

## **2.3. Semiformal specification of the security function**

### **2.3.1. Identification and Authentication**

<b>Construction</b>	<b>Security claim</b>
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will detect ...</i> after <i>security relevant event</i> using the mechanism defined in paragraph <i>n</i></p> <p><b>Target Phrase:</b> 3 ... the identity of the <i>{user, process}</i> requesting a <i>process</i></p> <p><b>Substitution:</b>  <i>function</i> = SEF IA1.1.1  <i>{user, process}</i> = <b>S1</b> Cardholder  <i>process</i> = SigG application  <i>security relevant event</i> = <b>SRE5</b> Successful</p>	<p>The TOE contains a SEF IA1.1.1 that will detect the identity of the subject <b>S1</b> “Cardholder” requesting a SigG application after <b>SRE5</b> “Successful cardholder authentication” using the mechanism defined in paragraph 4.1.</p> <p>Note that the SigG application as process means here the usage of all objects accessible within the opened SigG application.</p>

## Security Target

Construction	Security claim
<p>cardholder authentication <i>paragraph = 4.1</i></p>	
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will detect ...</i> after <i>security relevant event</i> using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase:</b> 3 ... the identity of the <i>{user, process}</i> requesting a <i>process</i>  <b>Substitution:</b>  <i>function</i> = SEF IA1.1.2  <i>{user, process}</i> = <b>S1</b> Cardholder  <i>process</i> = SigG application  <i>security relevant event</i> = <b>SRE11</b> Cardholder authenticated by reset code  <i>paragraph</i> = 4.4</p>	<p>The TOE contains a SEF IA1.1.2 that will detect the identity of the subject <b>S1</b> “Cardholder” requesting a SigG application after <b>SRE11</b> “Cardholder authenticated by reset code” using the mechanism defined in paragraph 4.4.            Note that the SigG application as process means here the usage of all objects accessible within the opened SigG application.            Note that the subject <b>S1</b> “Cardholder” in the context of IA1.1.2 can not directly generate digital signatures, but since he has gained the right to change the PIN, he can change the PIN, authenticate with a new PIN and then generate digital signatures.</p>
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will detect ...</i> after <i>security relevant event</i> using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase:</b> 3 ... the identity of the <i>{user, process}</i> requesting a <i>process</i>  <b>Substitution:</b>  <i>function</i> = SEF IA1.2  <i>{user, process}</i> = <b>S2</b> Somebody  <i>process</i> = SigG application  <i>security relevant event</i> = <b>SRE1</b> Resetting of the ICC, <b>SRE2</b> Deactivation of the ICC, <b>SRE3</b> Opening of the SigG application, <b>SRE4</b> Closing of the SigG application, <b>SRE6</b> Cardholder authentication failure, <b>SRE7</b> Repeated authentication failure, <b>SRE8</b> Authentication expiration, <b>SRE12</b> Cardholder authentication by reset code failed  <i>n</i> = 4.1</p>	<p>The TOE contains a SEF IA1.2 that will detect the identity of the subject <b>S2</b> “Somebody” requesting a SigG application after <b>SRE1</b> “Resetting of the ICC”, <b>SRE2</b> “Deactivation of the ICC”, <b>SRE3</b> “Opening of the SigG application”, <b>SRE4</b> “Closing of the SigG application”, <b>SRE6</b> “Cardholder authentication failure”, <b>SRE7</b> “Repeated authentication failure”, <b>SRE8</b> “Authentication expiration” and <b>SRE12</b> “Cardholder authentication by reset code failed” using the mechanism defined in paragraph 4.1.</p>
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will detect ...</i> after <i>security relevant event</i> using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase:</b> 3 ... the identity of the <i>{user, process}</i> requesting a <i>process</i></p>	<p>The TOE contains a SEF IA1.3 that will detect the identity of the subject <b>S7</b> “Potential attacker” requesting (i) an authentication attempt or (ii) activation of the Active Shield of the ICC to the TOE after <b>SRE10</b> “Potential security violation</p>

## Security Target

Construction	Security claim
<p><b>Substitution:</b>  <i>function</i> = SEF IA1.3  <i>{user, process}</i> = <b>S7</b> Potential attacker  <i>process</i> = (i) authentication attempt or (ii) activation of the Active Shield of the ICC to the TOE  <i>security relevant event</i> = <b>SRE10</b> Potential security violation occurred  <i>n</i> = 4.1</p>	<p>occurred” using the mechanism defined in paragraph 4.1.</p>
<p>Action Phrase: This TOE contains a function that will permit ... after security relevant event using the mechanism defined in paragraph n  Target Phrase: 13... the <i>access-set</i> of an <i>object</i>  Substitution:  <i>function</i> = SEF IA2  <i>access-set</i> = S1 Cardholder, modify  <i>object</i> = object O3 SigG cardholder reference data  <i>security relevant event</i> = SRE5 Successful cardholder authentication  <i>n</i> = 4.2</p>	<p>This TOE contains a SEF IA2 that will permit the subject <b>S1</b> “Cardholder” to modify an object <b>O3</b> “SigG cardholder reference data” after <b>SRE5</b> “Successful cardholder authentication” using the mechanism defined in paragraph 4.2.</p>
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that will prevent ... after <i>security relevant event</i> using the mechanism defined in paragraph n  <b>Target Phrase:</b> 13 ... the <i>access-set</i> of an <i>object</i>  <b>Substitution:</b>  <i>function</i> = SEF IA3  <i>access-set</i> = S1 Cardholder, <b>S2</b> Somebody; use for cardholder authentication  <i>object</i> = <b>O3</b> SigG cardholder reference data  <i>security relevant event</i> = <b>SRE7</b> Repeated authentication failure  <i>n</i> = 4.3</p>	<p>This TOE contains a SEF IA3 that will prevent the use for cardholder authentication of the object <b>O3</b> “SigG cardholder reference data” by the <b>S1</b> “Cardholder” and <b>S2</b> “Somebody” after <b>SRE7</b> “Repeated authentication failure” using the mechanism defined in paragraph 4.3.</p>
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that will permit ... after <i>security relevant event</i> using the mechanism defined in paragraph n  <b>Target Phrase:</b> 13 ... the <i>access-set</i> of an <i>object</i>  <b>Substitution:</b>  <i>function</i> = SEF IA4.1</p>	<p>This TOE contains a SEF IA4.1 that will permit a subject <b>S1</b> “Cardholder” to unblock the object <b>O3</b> “SigG cardholder reference data” after <b>SRE11</b> “Cardholder authenticated by reset code” using the mechanism defined in paragraph 4.4.</p>

## Security Target

Construction	Security claim
<p><i>access-set</i> = subject <b>S1</b> Cardholder, unblock  <i>object</i> = object <b>O3</b> SigG cardholder reference data  <i>security relevant event</i> = <b>SRE11</b> Cardholder authenticated by reset code  <i>n</i> = 4.4</p>	
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will permit ...</i> after <i>security relevant event</i> using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase</b><sup>13</sup> ... the <i>access-set</i> of an <i>object</i>  <b>Substitution:</b>  <i>function</i> = SEF IA4.2  <i>access-set</i> = <b>S1</b> Cardholder, modify  <i>object</i> = <b>O3</b> SigG cardholder reference data  <i>security relevant event</i> = <b>SRE11</b> Cardholder authenticated by reset code  <i>n</i> = 4.4</p>	<p>This TOE contains a SEF IA4.2 that will permit the subject <b>S1</b> “Cardholder” to modify the object <b>O3</b> “SigG cardholder reference data” after <b>SRE11</b> “Cardholder authenticated by reset code” using the mechanism defined in paragraph 4.4.</p>

### 2.3.2. Access Control

Construction	Security claim
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will permit ...</i> using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase:</b> 12 ... the <i>access-set</i> of a {<i>user, process</i>}  <b>Substitution:</b>  <i>function</i> = SEF AC1.1  <i>access set</i> = <i>acy(s,o)</i>  {i<sub>user, process</sub>} = subject <i>s</i>  <i>n</i> = 4.6</p>	<p>This TOE contains a SEF AC1.1 that will permit the access-set <i>acy(s,o)</i> of a subject <i>s</i> using the mechanism defined in paragraph 4.6.  Note that for each subject <b>S1</b>, <b>S2</b> and <b>S7</b> the access-set <i>acy(s,o)</i> lists the allowed access-types to an object <i>o</i>, where <i>o</i> represents <b>O1</b> to <b>O12</b> in <b>Table 10</b>.</p>
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will prevent ...</i> using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase:</b> 12 ... the <i>access-set</i> of a {<i>user, process</i>}  <b>Substitution:</b>  <i>function</i> = SEF AC1.2  <i>access set</i> = <i>acn(s,o)</i></p>	<p>This TOE contains a SEF AC1.2 that will prevent the access-set <i>acn(s,o)</i> of a subject <i>s</i> using the mechanism defined in paragraph 4.6.  Note that for each subject <b>S1</b>, <b>S2</b> and <b>S7</b> the access-set <i>acn(s,o)</i> lists the access-types which are not allowed to an object <i>o</i> where <i>o</i> represents <b>O1</b> to <b>O12</b> in <b>Table 11</b>.</p>



## Security Target

Construction	Security claim
<p><i>{user, process}</i> = subject <i>s</i>  <i>n</i> = 4.6</p>	
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will prevent</i> the ... using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase:</b> 13 ... the <i>access-set</i> of an <i>object</i>  <b>Substitution:</b>  <i>function</i> = SEF AC2  <i>access set</i> = <b>S1</b> Cardholder, <b>S2</b> Somebody, <b>S3</b> IFD, <b>S7</b> Potential attacker; extract  <i>object</i> = <b>O2</b> SigG private signature key of the cardholder  <i>n</i> = 4.5</p>	<p>This TOE contains a SEF AC2 that will prevent the <b>S1</b> “Cardholder”, <b>S2</b> “Somebody”, <b>S3</b> “IFD”, <b>S7</b> “Potential attacker” to extract the <b>O2</b> “SigG private signature key of the cardholder” using the mechanism defined in paragraph 4.5.</p>
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will prevent</i> the ... using the mechanism defined in paragraph <i>n</i>  <b>Target Phrase:</b> 13 ... the <i>access-set</i> of an <i>object</i>  <b>Substitution:</b>  <i>function</i> = SEF AC3  <i>access set</i> = <b>S7</b> Potential attacker, open  <i>object</i> = <b>O1</b> SigG application  <i>n</i> = 4.6</p>	<p>This TOE contains a SEF AC3 that will prevent the <b>S7</b> “Potential attacker” to open the object <b>O1</b> “SigG application” using the mechanism defined in paragraph 4.7.</p>

### 2.3.3. Audit

Construction	Security claim
<p><b>Action Phrase:</b> This TOE contains a <i>function</i> that <i>will ensure</i>  <b>Target Phrase:</b> 1 ... <i>audit-information</i> concerning <i>security-relevant-events</i>  <b>Substitution:</b>  <i>function</i> = SEF AU1  <i>audit-information</i> = blocking information  <i>security-relevant-events</i> = <b>SRE10</b></p>	<p>This TOE contains a SEF AU1 that will ensure blocking information concerning <b>SRE10</b>.  The SEF AU1 uses the mechanisms defined in paragraph 4.7.</p>

### 2.3.4. Object Reuse

## Security Target

Construction	Security claim
<p><b>Action Phrase:</b> The TOE contains a <i>function</i> that <i>will ensure ...</i> after <i>security-relevant-event</i> using the mechanism defined in paragraph <i>n</i>.</p> <p><b>Target Phrase:</b> 21: clearing of information from an <i>object</i>.</p> <p><b>Substitution:</b>  <i>function</i> = SEF OR1.1  <i>security-relevant-event</i> = <b>SRE5</b> or <b>SRE11</b>  <i>object</i> = temporary used storage areas  <i>n</i> = 4.8</p>	<p>The TOE contains a SEF OR1.1 that will ensure the clearing of the information after <b>SRE5</b> or <b>SRE11</b> from temporary used storage areas using the mechanism defined in paragraph 4.8.</p> <p>Note that OR1.1 refers to PIN and PUK.</p>
<p><b>Action Phrase:</b> The TOE contains a <i>function</i> that <i>will prevent ...</i> using the mechanism defined in paragraph <i>n</i>.</p> <p><b>Target Phrase:</b> 15: the <i>access-type</i> by {<i>user</i>, <i>process</i>} in respect of an <i>object</i>.</p> <p><b>Substitution:</b>  <i>function</i> = SEF OR1.2  <i>access-type</i> = extraction  <i>user</i> = <b>S1</b>, <b>S2</b>, <b>S7</b>  <i>process</i> = empty set  <i>object</i> = <b>O2</b>  <i>n</i> = 4.8</p>	<p>The TOE contains a SEF OR1.2 that will prevent the extraction by <b>S1</b>, <b>S2</b>, <b>S7</b> in respect of <b>O2</b> using the mechanism defined in paragraph 4.8.</p>

### 2.3.5. Data Exchange

Construction	Security claim
<p><b>Action Phrase:</b> The TOE contains a <i>function</i> that <i>will permit ...</i> before <i>security-relevant-event</i></p> <p><b>Target Phrase:</b> 13... the <i>access-set</i> of an <i>object</i></p> <p><b>Substitution:</b>  <i>function</i> = SEF DX1  <i>access-set</i> = <b>S2</b> “Somebody”, generate  <i>object</i> = <b>O2</b> “SigG private signature key of the cardholder”, <b>O12</b> “SigG public key of the cardholder”  <i>security-relevant-event</i> = operational phase</p>	<p>The TOE contains a SEF DX1 that will permit the subject <b>S2</b> “Somebody” to generate an object <b>O2</b> “SigG private signature key of the cardholder” and <b>O12</b> “SigG public key of the cardholder” before the operational phase.</p> <p>The SEF DX1 uses the mechanisms defined in paragraph 4.9.</p> <p>Note that the objects <b>O2</b> “SigG private signature key of the cardholder” and <b>O12</b> “SigG public key of the cardholder” can be generated only together and only before the operational phase of the TOE.</p>
<p><b>Action Phrase:</b> The TOE contains a <i>function</i> that <i>will permit ...</i> before <i>security-relevant-event</i></p> <p><b>Target Phrase:</b> 13 ... the <i>access-set</i> of an <i>object</i></p>	<p>The TOE contains a SEF DX2 that will permit <b>S1</b> “Cardholder” to use for signature generation the object <b>O2</b> “SigG private signature key of the cardholder”</p>

## Security Target

Construction	Security claim
<p><b>Substitution:</b>  <i>function</i> = SEF DX2  <i>access-set</i> = <b>S1</b> Cardholder, use for signature generation  <i>security-relevant-event</i> = <b>SRE8</b>  <i>object</i> = <b>O2</b> SigG private signature key of the cardholder</p>	<p>before <b>SRE8</b>.            The SEF DX2 uses the mechanisms defined in paragraph 4.10.            Note that the TOE automatically generates <b>SRE8</b> after one digital signature has been generated in (case_one) or after <i>n</i> digital signatures have been generated in (case_n).</p>

### 3. Underlying Security Policy

The ITSEC [1] states in paragraph 2.81 that at evaluation levels E4 and above, a TOE must implement an underlying model of security policy, i.e. there must be an abstract statement of the important principles of security that the TOE will enforce. This shall be expressed in a formal style, as a formal model of security policy.

This security target provides the underlying security policy on the basis of the security objectives in section 1.6 and the security functions in chapter 2 and in accordance with [3]. The underlying security policy describes the security principles of the TOE's dynamic behaviour. Each time the TOE makes an assumption about the human user and the IFD expressed in the current authentication state and the rights the outside world has.

The formal model of the security policy of the TOE and its informal interpretation are provided in [4]. The additional informal interpretation of the formal model of the security policy of the TOE is given in [5].

#### 3.1. Security state

The **current internal state** is the tuple of (i) the **current authentication state CAS** (see Table 12) reflecting the assumption about the subjects currently using the TOE and (ii) the retry counters (values of RC-PIN and RC-PUK).

The parameter **assumption about the subjects currently using the TOE** depends on (i) the currently selected application context (e.g.: Is the DF<sub>SigG</sub> selected?) and (ii) the results of the authentication attempts of human users (see Table 12).

The **retry counter for the reference data RC-PIN** (i) stores the number of failed authentication attempts by presenting the verification data after the last successful authentication attempt with this data or (ii) is equal to a fixed value if the number of failed authentication attempts by presenting the verification data exceeds the maximum allowed number of failed authentication attempts with this data.

The **retry counter for the reset code RC-PUK** (i) stores the number of failed authentication attempts by presenting the reset code after the last successful authentication attempt with this code or (ii) is equal to a fixed value if the number of failed authentication attempts with the reset code exceeds the maximum allowed number of failed authentication attempts with reset code. The retry counter for the reference data RC-PIN and the retry counter for the reset code RC-PUK are persistently stored in the TOE.

The **potential security violation flags** *pa* will be set by the TOE indicating that a potential security violation was detected. These flags are persistently set and cannot be reset<sup>26</sup>.

The following table identifies the different current authentication states described later on.

---

<sup>26</sup> these flags will be set if (i) the RC-PUK= 0 or (ii) by receiving the appropriate signal from the ICC (AE5.4).

**Table 12: Identification of different current authentication states**

	<b>Current authentication state</b>
<b>CAS1</b>	Somebody using the TOE
<b>CAS2</b>	Somebody using the SigG application
<b>CAS3</b>	Cardholder using an IFD
<b>CAS6</b>	A potential attacker ( <u>Secure Blocking State</u> )
<b>CAS7</b>	Somebody using the SigG application with blocked Cardholder reference data (RC-PIN=0)

A human user is authenticated if (i) the human user has performed a successful authentication by presenting the verification data defined for this subject and (ii) this authentication is not deemed as expired by the TOE for any reason.

The **current authentication state CAS1 Somebody using the TOE** represents the state of the TOE in which (i) the TOE is operational, but the SigG application is currently not opened, and (ii) the human user is not authenticated as **S1**. RC-PIN and RC-PUK can be any value (either zero or greater than zero) and the **Potential security violation flag A** is not set.

The **current authentication state CAS2 Somebody using the SigG application** represents the state of the TOE in which (i) the SigG application is currently opened and (ii) the human user is not authenticated as **S1**. RC-PIN and RC-PUK are greater than zero.


The **current authentication state CAS3 Cardholder using an IFD** represents the state of the TOE in which (i) the SigG application is currently opened and (ii) the human user is authenticated as **S1**. In this case both RC-PIN and RC-PUK can only be greater than zero, since a successful authentication by PIN (**SRE5**) always implies that RC-PIN is reset to its initial value (RC-PIN:=3) and that RC-PUK > 0 (the TOE is not in the secure blocking state **CAS6**).

The **current authentication state CAS6 Potential attacker** represents the secure **Blocking state of the TOE** in which (i) the SigG application is not operational (this is ensured by the secure blocking state of the TOE) and (ii) no human user is successfully authenticated for the SigG application. The **CAS6** is a permanent state of the TOE. This state is indicated by the potential security violation flags *pa* persistently stored in the TOE. See also **SRE10**.

The **current authentication state CAS7 Somebody using the SigG application with blocked Cardholder reference data** represents the state of the TOE in which (i) the SigG application is currently opened, (ii) the human user is not authenticated as **S1** and (iii) the **O3** SigG cardholder reference data are blocked for cardholder authentication (i.e. RC-PIN=0, RC-PUK > 0).

The following **Figure 3** illustrates the decisions for the current authentication state.

**Figure 4: Logical decision-tree diagram**

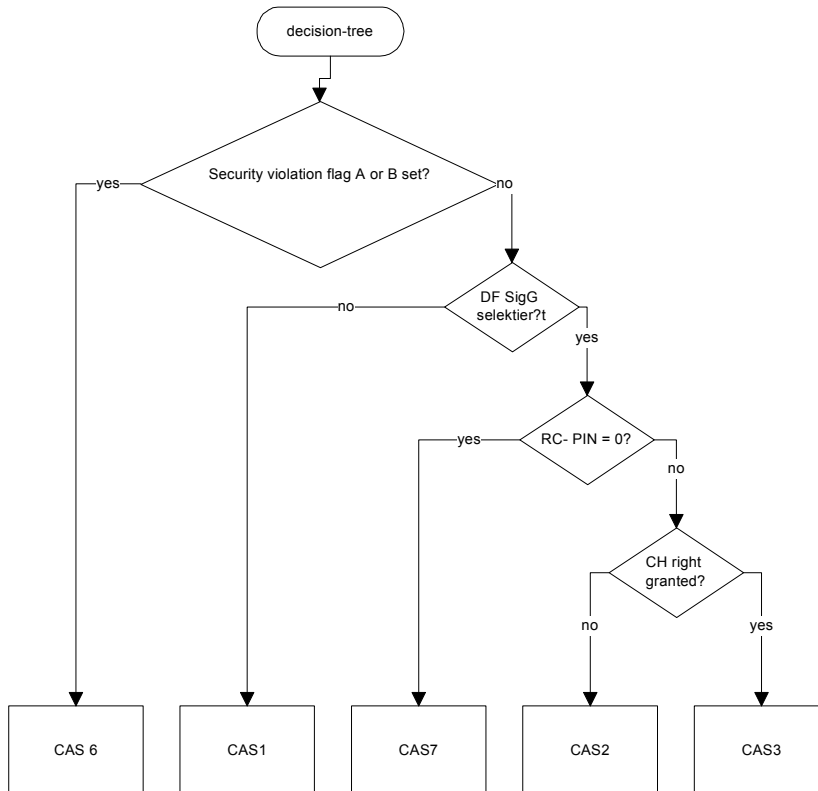

The current authentication state will be set and changed by security relevant events as described by the following state transition table (**Table 13**). The complete definition of the state transition is based on the SEF under the generic heading identification and authentication as described in sub-sections 2.2.1 and 2.3.1 and the following rules:

- (1) If the SRE is not expected in the CAS but does not indicate a security relevant error then the SRE does not change the CAS.
- (2) If the SRE indicates a security relevant error in the CAS then the CAS is changed into CAS6. Such a security relevant error occurs especially if cardholder authentication succeeds or fails without opening the SigG application.

The state transition in **CAS1** caused by **SRE3** depends on the value of the retry counter for the reference data (RC-PIN). That's why the security relevant event CAS3 is divided into two security relevant events:

**SRE3a:** the security relevant event SRE3a “**Opening of the SigG application with blocked reference data**” (RC-PIN=0) occurs if (i) no file of the SigG application has been selected before and (ii) a file in the SigG application directory is selected

## Security Target

and (iii) the retry counter for the reference data RC-PIN does not allow authentication by presenting the verification data (i. e. the number of failed authentication attempts by presenting the verification data exceeds the maximum allowed number of failed authentication attempts with the verification data, RC-PIN=0).

**SRE3b:** the security relevant event SRE3b “**Opening of the SigG application with unblocked reference data**” (RC-PIN>0) occurs if (i) no file of the SigG application has been selected before and (ii) a file in the SigG application directory is selected and (iii) the retry counter for the reference data RC-PIN allows authentication by presenting the verification data (i. e. the number of

failed

authentication attempts by presenting the verification data does not exceed the maximum allowed number of failed authentication attempts with the verification data, RC-PIN>0).

**Table 13: State transition table**

	<b>CAS1</b> Smb. → TOE	<b>CAS2</b> Smb. → Sig. app.	<b>CAS3</b> CH → IFD	<b>CAS6</b> Secur. viola- tion	<b>CAS7</b> Smb. → Sig. app. RC-PIN=0
<b>SRE1</b>	CAS1	CAS1	CAS1	CAS6	CAS1
<b>SRE2</b>	CAS1	CAS1	CAS1	CAS6	CAS1
<b>SRE3a</b>	CAS7	-	-	CAS6	(CAS7)
<b>SRE3b</b>	CAS2	(CAS2)	(CAS3)	CAS6	-
<b>SRE4</b>	-	CAS1	CAS1	CAS6	CAS1
<b>SRE5</b>	-	CAS3	CAS3	(CAS6)	-
<b>SRE6</b>	-	CAS2	CAS2	(CAS6)	-
<b>SRE7</b>	-	CAS7	-	(CAS6)	(CAS7)
<b>SRE8</b>	-	-	CAS2	(CAS6)	-
<b>SRE10</b>	CAS6	CAS6	CAS6	CAS6	CAS6
<b>SRE11</b>	-	CAS2	CAS3	(CAS6)	CAS2
<b>SRE12</b>	-	CAS2	CAS3	(CAS6)	CAS7

**Comments to Table 13**

If the SRE<sub>m</sub> occurs in the CAS<sub>n</sub> then the CAS<sub>n</sub> is changed into the CAS shown in the row *m* and the column *n*.

Notation:

Smb. Somebody **S2**,

CH Cardholder **S1**

A → B means human user A uses IT-System B as short hint to the definition of the CAS,

## Security Target

RC-PIN value of the retry counter RC-PIN, where it is assumed that (i) the retry counter is set by SRE5 and SRE11 to the initial value, (ii) is decremented by SRE6 and SRE7 and (iii) if the number of failed authentication attempts by presenting the verification data exceeds the maximum allowed number of failed authentication attempts with the verification data then RC-PIN=0


(CASx) The SRE defined for this row is not expected in the CAS defined for this column. In this case the TOE will (i) remain in CAS6 if a potential attack was detected (i. e. the TOE was already in CAS6) and (ii) revoke the cardholder and IFD authentication if the TOE was not in CAS6 (i. e. the TOE goes into CAS1). These state transitions are defined for completeness of the formal model [4] and are not shown in **Figure 5**.

**Figure 5** illustrates the state transition with exception of the security relevant events marked with brackets in **Table 13**.



## Security Target

**Figure 5: State transition**

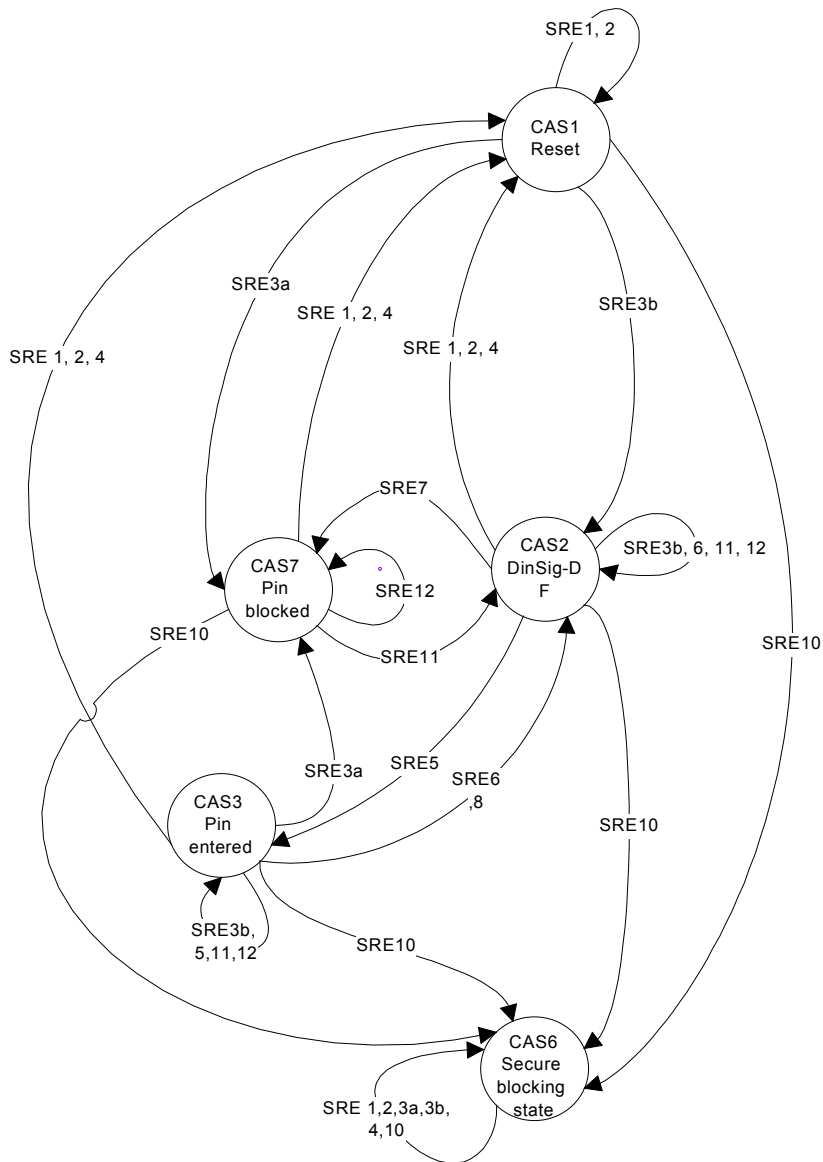

- SRE1: Reset
- SRE2: deactivate
- SRE3a: open RC-PIN=0
- SRE3b: Open, RC-PIN>0
- SRE4: Close
- SRE5: Authenticate
- SRE6: Auth. failed
- SRE7: repeated auth. failed
- SRE8: Auth. expired
- SRE10: Security Violation
- SRE11: PUK authentication
- SRE12: PUK auth. failed

### 3.2. Access control for command execution

The access control decisions take place within the command execution. Access control decisions are based on the type of object associated with the access type (see paragraph 2.1.3) and the current authentication state.

**Table 14** and **Table 14** define access-sets in terms of the security states:

- (1) The TOE in the current authentication state in column  $t$  will permit the requested access-type  $ssy(o,t)$  to the object in the row  $o$ .
- (2) The TOE in the current authentication state in column  $t$  will deny the requested access-type  $ssn(o,t)$  to the object in the row  $o$ .

Note that these access-sets concern a requested access and do not guarantee the possibility of an access request. This does not contradict the security policy because the reliability of service is not a security objective of the TOE. In CAS6 the SigG Application cannot be opened any more (see **SRE10**).

**Table 14: Access-sets  $ssy(o,t)$  defined in terms of the security states**

	CAS1	CAS2	CAS3	CAS6	CAS7
<b>O1</b>	open, close	open, close	open, close	close	open, close
<b>O2</b>			use for signature generation		
<b>O3</b>		use for cardholder authentication, block	use for cardholder authentication, modify, block, unblock		unblock
<b>O4</b>		use for authentication, block	use for authentication, block		use for authentication, block
<b>O5</b>		read	read		read
<b>O6</b>		read (only with Cert)	read (only with Cert)		read (only with Cert)
<b>O12<sup>27</sup></b>		read	read		read

<sup>27</sup> if still present (could have been deleted by the card manufacturer)

## Security Target

**Table 15: Access-sets ssn(o,t) defined in terms of the security states**

	<b>CAS1</b>	<b>CAS2</b>	<b>CAS3</b>	<b>CAS6</b>	<b>CAS7</b>
<b>O1</b>				open	
<b>O2</b>	extract, generate, use for signature generation	extract, generate, use for signature generation	extract, generate	extract, generate, use for signature generation	extract, generate, use for signature generation
<b>O3</b>	use for cardholder authentication, modify, block, unblock	modify, unblock		use for cardholder authentication, modify, block, unblock	use for cardholder authentication, modify, block
<b>O4</b>	use for authentication, block			use for authentication, block	
<b>O5</b>	modify, read	modify	modify	modify, read	modify
<b>O6</b>	modify, read	modify	modify	modify, read	modify
<b>O12</b>	generate, modify, read	generate, modify	generate, modify	generate, modify, read	generate, modify

### 4. Security Mechanisms

The security functions specified in chapter 2 shall be implemented using the following mechanisms.

**Table 16: Security mechanisms**

ID	Mechanism
M1	Human user authentication
M2	Change the unblocked reference data
M3	Locking of the reference data
M4	Unblocking and changing of the reference data
M5	Extraction resistance
M6	Access control for command execution
M7	Secure blocking state
M9	Clearing of memory
M10	Signature key pair generation
M11	Signature generation

#### 4.1. M1: Human user authentication

The human user authenticates himself using a knowledge-based authentication mechanism.

Note that the human user chooses the kind of authentication information and the mechanism he wants to use for authentication: (i) O3 “SigG cardholder reference data” (PIN) with mechanism M1 or (ii) O4 “SigG cardholder reset code” (PUK) with mechanism M4.

The human user using mechanism M1 presents his verification data and the mechanism M1 compares the presented verification data with the stored reference data in the SigG application. Successful authentication of the cardholder by O3 is defined as **SRE5** “Successful cardholder authentication”. If an authentication attempt with O3 fails, the mechanism M3 will define whether the **SRE6** “Cardholder authentication failure” or **SRE7** “Repeated authentication failure” occurs.

In accordance with [9] the verification data consist of a string of minimal 6 ASCII characters.

The mechanism M1 will detect the S7 “Potential attacker”, if the TOE is in the **Blocking state of the TOE** (see **SRE10** and **CAS6**)<sup>28</sup>.

<sup>28</sup> In fact the part of M1 detecting the “Potential attacker” is implemented by the mechanism M7 (see below).

## Security Target

If the TOE is not in the Blocking state of the TOE then the mechanism M1 will detect the default identity S2 “Somebody” until the cardholder is successfully authenticated.

### 4.2. M2: Change the unblocked reference data

The mechanism M2 implements the following security sub-functions with one command:

- (1) authentication of the cardholder by knowledge of the verification data matching **O3** “SigG cardholder reference data” (PIN),
- (2) modification of the **O3** (PIN) to the presented new string of characters.

The command sent to the TOE contains (i) the verification data and (ii) a string of characters as new reference data of the cardholder. If (a) the number of consecutive failed authentication attempts with reference data does not exceed the maximum number of allowed failed authentication attempts (RC-PIN>0) and (b) the verification data presented for human user authentication match the reference data **O3** (PIN) stored for the SigG application of the TOE, then (i) the retry counter (see mechanism M3) will be reset to the initial value (RC-PIN:=3) and (ii) the presented string will be stored as new value of the **O3** (PIN). Successful authentication of the cardholder is defined as **SRE5** “Successful cardholder authentication”. If an authentication attempt fails the mechanism M3 will define whether the **SRE6** “Cardholder authentication failure” or **SRE7** “Repeated authentication failure” occurs.

### 4.3. M3: Locking of the reference data

The mechanism M3 implements the following security sub-functions:

- (1) detection of **SRE6** "Cardholder authentication failure" and **SRE7** “Repeated authentication failure“ by means of a retry counter (RC-PIN) for the reference data (PIN),
- (2) blocking the **O3** SigG cardholder reference data (PIN) for the use for cardholder authentication.

An authentication by the **O3** “SigG cardholder reference data” is attempted by use of mechanism M1 or M2. The retry counter for the reference data RC-PIN counts the number of failed authentication attempts by presenting the verification data. Each time a successful authentication by presenting the verification data takes place this retry counter is reset to a defined initial value (RC-PIN:=3). The retry counter for the reference data is equal 0 (RC-PIN=0), if the number of consecutive failed authentication attempts reaches or exceeds the maximum number of allowed failed authentication attempts.

If the authentication attempt has failed and the retry counter after this authentication attempt is not equal 0 (RC-PIN>0), then this event is the **SRE6**. If the authentication attempt failed and the retry counter after this authentication attempt is equal 0 (RC-PIN=0), then this event is the **SRE7**.

If the **SRE7** occurs the **O3** (PIN) will be blocked for the use for cardholder authentication. This blocking remains stored in the TOE and may only be reset by mechanism M4.

### 4.4. M4: Unblocking and changing of the reference data

The mechanism M4 implements the following security sub-functions with two commands:

1. authentication of the cardholder by knowledge of the reset code matching **O4** “SigG cardholder reference reset code” (PUK),
  - 2.1 unblocking the **O3** “SigG cardholder reference data” (PIN) for the use for cardholder authentication,
  - 2.2 modifying the **O3** (PIN) to the presented new string of characters.

The human user authenticates himself using a knowledge based authentication mechanism.

Note that the human user chooses the kind of authentication information and the mechanism he wants to use for authentication: (i) **O3** (PIN) with mechanism M1 or (ii) **O4** (PUK) with mechanism M4.

If the mechanism M4 is used, then the first command sent to the TOE will contain the reset code and the second command a string of characters as new reference data of the cardholder.

If the retry counter of the reset code indicates that human user authentication by presenting the reset code is not allowed (RC-PUK=0), then (i) the authentication attempt will be rejected (independently whether the presented reset code matches the stored reset code or not), (ii) the retry counter for the reference data (RC-PIN, see mechanism M3) will not be reset and (iii) the **O3** (PIN) will not be modified. Moreover **SRE10** will occur in this case.

If (a) the retry counter of the reset code indicates that human user authentication by presenting the reset code is still allowed (RC-PUK>0) and (b) the presented reset code matches **O4** (PUK) then (i) the retry counters for the reference data and for the reset code will be reset to the initial value (RC-PIN:=3, RC-PUK:=3), (ii) the **O3** (PIN) will be unblocked for the use for cardholder authentication and (iii) the presented string will be stored as new value of the **O3**.

If the reset code presented does not match **O4** “SigG cardholder reset code” (PUK) then (i) the authentication failure with reset code is counted by decrementing the retry counter for the reset code (RC-PUK := RC-PUK - 1), (ii) the **O3** (PIN) will remain blocked for the use for cardholder authentication and (iii) the **O3** (PIN) will not be changed. If the retry counter of the reset code indicates that human user authentication by presenting the reset code is still allowed (RC-PUK>0) then **SRE12** “Cardholder authentication by reset code failed” will occur. If the retry counter of the reset code indicates that human user authentication by presenting the reset code is not allowed any longer (e. g. the defined maximum number of authentication failures by presenting the reset code is exceeded, RC-PUK reaches 0) then this event triggers the **SRE10** “Potential security violation occurred”.

### 4.5. M5: Extraction resistance

The TOE will implement security mechanisms (summarised as M5) to prevent extraction of the SigG private signature keys (**O2**) of the cardholder as required for SEF AC2.

There is no command for reading a key-record (SK.CH.DS).

## Security Target

Appropriate measures are implemented by the TOE, which provide the protection of the relevant SigG private signature key of the cardholder against Differential Power Analysis (DPA) as well as Simple Power Analysis (SPA) during its use (i.e. during the generation of signatures).

The SigG private signature key (O2) is also protected against DFA (Differential Fault Analysis, "Bellcore-Attack").

Note that though the DPA, SPA and DFA countermeasures are provided by the TOE, they can be tested only on the ICC, but not in a simulator environment.

### 4.6. M6: Access control for command execution

The TOE will implement security mechanisms (summarized as M6) as required for SEF AC1. These mechanisms will, according to the underlying security policy,

- (1) implement a security **state machine** as described in section 3.1 and
- (2) control the access as described in section 3.2.

### 4.7. M7: Secure blocking state

The TOE will implement a security mechanism M7 as required for SEF AC3 and AU1.

- a) If the retry counter RC-PUK of the **O4** (PUK) reaches the value 0, the  $DF_{\text{SigG}}$  is blocked definitely and permanently by setting the potential security violation flag A in the header of the  $DF_{\text{SigG}}$ .
- b) The security violation flag B is persistently set if the TOE receives the appropriate signal by the hardware described in (AE5.4).

These states of the TOE are called the Secure Blocking State of the TOE.

- c) If the TOE is in its secure blocking state, M7 will generate a corresponding return code and send it to the IFD.

### 4.8. M9: Clearing of memory

The TOE will implement security mechanism M9 as required for SEF OR1.

- a) PIN and PUK will be immediately actively erased from the RAM or XRAM areas after their use.
- b) The TOE does not store the key SK.CH.DS in any temporary area.

### 4.9. M10: Signature key pair generation

The TOE will implement the following security mechanisms (summarised as M10) as required for SEF DX1 in accordance with [8].

- a) Generation of random numbers using the onboard true random number generator.
- b) Quality check of the prime number (Rabin-Miller-Test)

## Security Target

- c) RSA Algorithm with a key length of 1024 Bit.

This approach is described in [8], section 1.4 (RSA) and considered as being adequate.

Note that the mechanism M10 uses the output of the hardware true random number generator and, hence, can be tested only on the ICC.

### **4.10. M11: Signature generation**

The TOE will implement security mechanisms (summarised as M11) as required for SEF DX2 in accordance with [8] and [9].

- a) RSA Algorithm with a key length of 1024 Bit (see [8], section 1.4).
- b) Hash SHA-1 (see [8], section 1.3).
- c) PKCS1 BT1 Padding according to [9] (Appendix A, section A.1.2).



### 5. Suitability of the TOE's security features

This section describes the suitability of the TOE's security features to counter all assumed threats. A simple mapping between the threats, the security objectives and the SEF and threats is shown based on the explanations given in section 1.6 in the following table.

**Table 17: Mapping between the threats, the security objectives and the SEF**

	SO1 "Prevent disclosure, copying or modification of the cardholder's private key"	SO2 "Prevent unauthorised use of the SigG digital signature function"	SO6 "Quality of key generation"	SO7 "Provide secure digital signatures"	SO8 "React to potential security violations"
T1 "Extraction of the cardholder's private key"	AC1, AC2, OR1			DX1, DX2	AC3, AU1
T2 "Misuse of the signature function"		IA1 – IA4, AC1			AC3, AU1
T3 "Forged data ascribed to the cardholder"			DX1	DX2	AC3, AU1

#### Threat T1

The threat T1 "Extraction of the cardholder's private key" will be countered by the security objectives SO1, SO7 and SO8.

The TOE shall implement the security enforcing function AC1 "Access control of commands" and AC2 "Access control of extraction" described in sections 2.2.2 and 2.3.2 to prevent misuse of ICC commands implemented by the TOE and the extraction of the SigG private signature key. The SEF OR1 described in sections 2.2.4 and 0 shall prevent illicit information flow between the SigG application including the SigG private signature key and other applications embedded on the ICC through temporary used storage areas. The SEF DX1 and DX2 described in section 2.2.5 and 2.3.5 shall prevent disclosing of the SigG private signature key of the cardholder by cryptanalytic attacks against the digital signatures generated by the TOE. The secure blocking state of the TOE CAS6 shall ensure the security of the SigG private signature key of the cardholder if a potential attack was detected (see SEF AC3 and AU1 in sections 2.2.2, 2.2.3, 2.3.2 and 2.3.3).

#### Threat T2

The threat T2 "Misuse of the signature function" will be countered by the security objectives SO2, SO8 in case that the Option Public IFD is not supported.

The TOE implements the security enforcing function IA1, IA2, IA3 and IA4 for cardholder authentication (described in sections 2.2.1 and 2.3.1) and AC1 for access control over the

## Security Target

usage of the SigG signature key of the cardholder (described in sections 2.2.1, 2.3.1, 2.2.2 and 2.3.2) to fulfil the security objective SO2. The (AE4.2)(4) assumes that the environment keeps the confidentiality and integrity of the data transferred between the office IFD and the ICC. The secure blocking state of the TOE CAS6 shall ensure the security of the SigG signature function if a potential attack was detected (see SEF AC3 and AU1 in sections 2.2.2, 2.2.3, 2.3.2 and 2.3.3).

### Threat T3

The threat T3 “Forged data ascribed to the cardholder” will be countered by the security objectives (i) SO7 “Provide secure digital signatures” and (ii) SO6 “Quality of key generation”. The TOE implements the security enforcing function DX1 described in sections 2.2.5 and 2.3.5 to fulfil the security objective SO6 by means of generating a secure SigG signature key pair. The AE2 assumes the reliable public key infrastructure needed to check whether the cardholder was the sender of a signed message or not. SEF DX2 ensures cryptographic security of the digital signature. Therefore the forgery of digital signatures is prevented. The confidentiality of the SigG private signature key and limitation of access to the signature function prevent the repudiation of valid digital signatures addressed by threat T3. The secure blocking state of the TOE CAS6 shall prevent misuse of the TOE if a potential attack was detected (see SEF AC3 and AU1 in sections 2.2.2, 2.2.3, 2.3.2 and 2.3.3).

**6. Evaluation Target**

The TOE's security mechanisms of ITSEM type A are expected to provide strength of mechanisms, which is HIGH.

The TOE will be evaluated using level E4 ("E four").

### 7. List of abbreviations

AC	Access Control
ACE	Advanced Crypto Engine
AE1	Life cycle security
AE2	Integrity and quality of key material
AE3	SigG compliant use of the TOE
AE4	Use with SigG accredited IFD
AE5	Security assumption about the ICC hardware
AEn.m	Assumption about the Environment (No. n)
CAS1	Somebody using the TOE
CAS2	Somebody using the SigG application
CAS3	Cardholder using an IFD
CAS6	A potential attacker
CAS7	Somebody using the SigG application with blocked Cardholder reference data
CH	Cardholder
DX	Data Exchange
IA	Identification and Authentication
IC	Integrated Circuit
ICC	Integrated Circuit Card
IFD	Interface Device
ITSEC	Information Technology Security Evaluation Criteria
M1	Human user authentication
M10	Signature key pair generation
M11	Signature generation
M2	Change the unblocked reference data
M3	Locking of the reference data
M4	Unblock and change of the reference data
M5	Extraction resistance
M6	Access control for command execution
M7	Secure blocking state
M9	Clearing of memory

## Security Target

O1	SigG application
O2	SigG private signature key of the cardholder
O3	SigG cardholder reference data
O4	SigG cardholder reset code
O5	SigG signature key certificate of the cardholder
O6	SigG public key of the root certification authority
On	Object (No. n)
OR1	Object Reuse
PIN	Personal identification number
PK	Public Key
PUK	Personal unblocking key
S1	Cardholder
S2	Somebody
S3	IFD
S7	Potential attacker
SEF	Security Enforcing Function
SigG	Signaturgesetz
SigV	Signaturverordnung
SK	Secret Key
Mn	Security Mechanism (No. n)
SO1	Prevent disclosure, copying or modification of the cardholder's private key
SO2	Prevent unauthorised use of the SigG digital signature function
SO6	Quality of key generation
SO7	Provide secure digital signature
SO8	React to potential security violations
SOn.m	Security Objective (No. n)
SRE1	Resetting of the ICC
SRE10	Potential security violation occurred
SRE11	Cardholder authenticated by reset code
SRE12	Cardholder authentication by reset code failed
SRE2	Deactivation of the ICC
SRE3	Opening of the SigG application
SRE3a	Opening of the SigG application with blocked reference data

## Security Target

SRE3b	Opening of the SigG application with unblocked reference data
SRE4	Closing of the SigG application
SRE5	Successful cardholder authentication
SRE6	Cardholder authentication failure
SRE7	Repeated authentication failure
SRE8	Authentication expiration
SREn	Security Relevant Event (No. n)
T1	Extraction of the cardholder's private key
T2	Misuse of the signature function
T3	Forged data ascribed to the cardholder
Tn.m	Threat (No. n)
TOE	Target of Evaluation

## 8. Glossary

**ACE**

Advanced Crypto Engine

**Anybody**

The set of the two subjects **S1** Cardholder and **S2** Somebody.

**ARA Counter**

**Acces Right Applicability Counter**

**Authenticated User**

Human user providing for the authentication by (i) knowledge or (ii) biometrical characteristics the verification data matching the reference data stored in the TOE for (a) a application or (b) in a global context.

**Authentication information**

Information used to prove or to verify the identity of a subject by means of authentication. The user authentication information is the verification data provided by the cardholder to prove her or his identity and the reference data used by the TOE to verify this identity. The authentication information for the mutual authentication (see [9], annex D) are the private device key used by the prover to calculate the authentication token and the public device key used by the verifier to verify this token.

**Blocking state of the TOE**

Secure State of the ICC disabling the Signature application of the ICC. This state is apparent to the cardholder by means of an appropriate return code.

**Cardholder**

The legitimate owner of a specific ICC running the TOE. The cardholder is the only person in legitimate possession of the reference data (PIN and PUK) matching the stored verification data for the SigG application of the TOE in the operational phase. In case of the (optional for the TOE) authentication by biometrical characteristics the assumption AE4.5 assumes that the cardholder is the only person who is able to provide the biometrical characteristics to generate the verification data matching the verification data stored for the SigG application of the TOE.

**Certificate**

A digital certificate bearing a digital signature and pertaining to the assignment of a public signature key to a natural person (signature key certificate) or a separate digital certificate containing further information and clearly referring to a specific signature key certificate (attribute certificate) (see Artikel 1 §2 SigG [6]).

**Certification authority**

A natural or legal person who certifies the assignment of public signature keys to natural persons and to this end holds a licence pursuant to Artikel 1 § 4 of the SigG [6].

## Security Target

### **Credentials for signature verification**

Public keys or certificates stored in the ICC for the purpose of SigG signature verifications.

### **Current authentication state**

A status of the TOE representing the current assumption about the subject currently using the TOE. The CAS is changed by security relevant events SRE and used for access control decisions.

### **Device authentication key pair**

Pair of a private key and a public key of a SigG accredited technical component for the mutual device authentication according to [9].

### **DFA**

Differential Fault Analysis

### **Device authentication certificate**

A certificate for a public key of a SigG compliant technical component to be used for the mutual device authentication according to [9].

### **Digital Signature**

A digital signature is a seal affixed to digital data which is generated by the private signature key of the cardholder (a private signature key) and establishes the owner of the signature key (the cardholder) and the integrity of the data with the help of an associated public key provided with a signature key certificate of a certification authority.

### **Display message of the cardholder**

Secret string (i) stored in the SigG application of the TOE, (ii) displayed by the IFD after reading from the ICC and (iii) checked by the cardholder to verify the successful conduction of the mutual authentication procedure between ICC and IFD. See [9], section 18 and annex D for more details.

### **DPA**

Differential Power Analysis

### **Extraction (of a key)**

The extraction of the SigG private signature key of the cardholder covers (i) directly reading the key or (ii) copying the key to other devices even if the key is not generally disclosed in the process or (iii) inferring the key by analysing the results of computations performed by the ICC or (iv) inferring the key by analysing a physical observable.

### **FMSP**

Formal Model of the Security Policy

### **IFD**

abbreviation for: Interface Device

### **Infer**

Any form of determination of secret keys by analysing the results of computations performed by the ICC or analysing physical characteristics in the course of computation.



### **Integrated Circuit Card**

A smart card equipped with the TOE.

### **Interface Device**

Collectively all the devices and other equipment, to which the TOE is presented to for the purpose of performing ICC related services.

### **Non-SigG application**

Application which resides on the card and is different from SigG signature application. The TOE may provide specific functions for this application by its specific software components. The data of the other applications (i) are stored in directories and files of the ICC, (ii) are not executed as code by the TOE and (iii) are not subject of the evaluation.

### **office IFD**

A SigG compliant IFD under custody and responsibility of the cardholder.

### **Operational phase**

The life cycle phase of the ICC, when it is ready to be used by the cardholder for SigG digital signature generation (e. g. (i) TOE has been personalised for the cardholder and (ii) the SigG private signature key of the cardholder is stored in the TOE). The ICC will have been transferred to the cardholder typically involving some „smart card issuer“.

### **Personalization phase**

The life cycle phase, when the ICC is equipped with SigG application related data and data related to the specific cardholder. The TOE is personalised for the cardholder (e. g. The TOE stores the reference data for authentication by knowledge for the SigG application of the TOE which matches the verification data (Transport-PIN and PUK) given to the cardholder as the legitimate person in the operational phase). In case of Method of Use “Generation of cardholders signature key on the ICC” the TOE is used to generate the cardholder’s signature key pair on the ICC.

### **Potential security violation flags**

These flags are set by the TOE if:

- A The flag A is persistently set if the RC-PUK is decremented from 1 to 0 (i.e. reaches the value RC-PUK=0). The flag A is set in the header of the DF<sub>SigG</sub> and cannot be reset<sup>29</sup>.
- B The flag B is persistently set if the TOE receives the appropriate signal by the hardware described in (AE5.4)

### **Potential security violations**

A set of specified events to be deemed as potential tries to penetrate the TOE using logical interfaces to the TOE.

For this TOE, the term potential security violation is defined in (SO8.1).

When a potential security violation occurs, the TOE assumes the Potential

---

<sup>29</sup> We distinguish between the verb “set” and “reach” in relation to the RC-PUK: “set” the RC-PUK means to assign a value to the RC-PUK, “reach” means that RC-PUK equals a value after decrementing.

## Security Target

Attacker **S7** as user of the TOE.

### **Private key**

Part of a key pair of an asymmetric cryptographic algorithm. The private key shall be kept confidential.

### **public IFD**

A public IFD runs on behalf of a service provider to provide commercial services for the user. The cardholder is assumed to know whether the used IFD is (i) a public IFD or (ii) an office IFD.

### **Public key**

Part of a key pair of an asymmetric cryptographic algorithm. The public key may be published usually in form of a certificate to keep its authenticity and integrity.

### **RC-PIN**

Retry Counter for the PIN, synonym for Retry counter for the reference data

### **RC-PUK**

Retry Counter for the PUK, synonym for Retry counter for the reset code

### **Reference data**

Data stored in the SigG application of the TOE for checking the verification data presented by the human user for authentication as cardholder.

### **Reset code**

Data required to unlock the reference data and used for the authentication of the cardholder. The reset code is also named PUK.

### **Retry counter for the reference data**

The retry counter for the reference data (i) stores the number of allowed failed authentication attempts by presenting the verification data after the last successful authentication attempt with the verification data or (ii) will be equal to a fixed value if the number of failed authentication attempts by presenting the verification data exceeds the maximum number of allowed failed authentication attempts with the verification data.

### **Retry counter for the reset code**

The retry counter of the reset code (i) stores the number of allowed failed authentication attempts by presenting the reset code or (ii) will be equal to a fixed value if the number of failed authentication attempts with the reset code exceeds the maximum number of allowed failed authentication attempts with reset code. The retry counter for the reference data and the retry counter of the reset code are persistently stored in the TOE.

### **Secure Blocking State**

The TOE is defined to be in its secure blocking state, if one of the potential security violation flags is set.

### **Session**

Time frame from external reset by power supply on or reset signal to the ICC

## Security Target

until next external reset or power supply down of the ICC on which the TOE runs.

### **RMS**

Resource Management System

### **SigG compliant digital signature**

A digital signature compliant with the German digital signature legislative [6], [7], [8]. It shall be generated by SigG compliant technical components.

### **SigG accredited ICC**

ICC (i) being a SigG accredited technical component and (ii) equipped with the TOE supporting the Option Public IFD (especially supporting the mutual device authentication and secure messaging according to [9], section 18 and annex D).

### **SigG accredited IFD**

Public IFD (i) being a SigG accredited technical component and (ii) acting as customer IFD according to [9], section 18, and (iii) supporting the mutual device authentication and secure messaging according to [9], annex D).

### **SigG accredited technical component**

A technical component which (1) is produced as an example of an SigG compliant technical component, (2) being able to prove its own SigG accreditation by means of (2i) a private authentication key, and (2.ii) an authentication certificate of a policy certification authority for SigG accredited devices and (3) being able to verify the SigG accreditation of other devices by means of a public authentication key of the DEPCA for certificates of policy certification authority for SigG accredited devices.

### **SigG application services**

The functions provided for the cardholder by the TOE. The SigG application services are at least (i) SigG signature generation and (ii) reading SigG digital signature certificates.

### **SigG cardholder reference data**

Data permanently stored in the TOE to verify the cardholder authentication.

### **SigG cardholder verification data**

Data provided by the user to authenticate himself as cardholder (i) by knowledge or (ii) by biometrical characteristics.

### **SigG signature key pair of the cardholder**

Pair of asymmetric keys consisting of the SigG private signature key of the cardholder and the SigG public key of the cardholder.

### **SigG compliance of technical component**

A property of technical components adhering to the given SigG legislative with respect to its implementation and configuration. The SigG compliance of a technical component shall be evaluated and conformed according to [7] Anlage 1. The SigG compliance of a technical component is usually not directly apparent to the user or to another technical component. Note that a SigG compliant technical component is not necessarily a SigG accredited

technical component.

### **SigG private signature key of the cardholder**

Part of the SigG application and used by the TOE to generate a digital signature on behalf of the cardholder. The signature key is the private key of the SigG signature key pair of the cardholder.

### **SigG public key of the cardholder**

Public key corresponding to the SigG private signature key of the cardholder and used to verify a digital signature of the cardholder. The SigG public key of the cardholder is part of the SigG signature key pair of the cardholder and the SigG certificate of the cardholder.

### **SigG signature verification**

Process established with the help of an associated public key provided by a signature key certificate of a certification authority: (i) whether the digital signature of the message was generated by the owner of the signature key (the cardholder) and (ii) the integrity of the data. The TOE may provide a signature verification function, but this function is not a subject of this evaluation as a security enforcing function.

### **SPA**

Simple Power Analysis

### **Verification data**

Data presented by a human user for authentication as cardholder and corresponding to the reference data stored in the TOE. The verification data are also named PIN.

## 9. References

- [1] Information Technology Security Evaluation Criteria (ITSEC); Provisional Harmonised Criteria, Version 1.2, June 1991
- [2] Information Technology Security Evaluation Manual (ITSEM); Provisional Harmonised Methodology, Version 1.0, September 1993
- [3] ITSEC Joint Interpretation Library (ITSEC JIL); Version 2.0, November 1998
- [4] Generic Formal Model of Security Policy and its Informal Interpretation. Target of Evaluation: ICC embedded software for Signature Creation conforming with German SigG, SigV and DIN V 66291-1, Version 1.1, September 12, 2000
- [5] CardOS/M4.0 Additional explanations to informal interpretation of the formal model, Siemens AG, Version 1.0, 21.12.2000
- [6] Gesetz über Rahmenbedingungen für elektronische Signaturen und zur Änderung weiterer Vorschriften (in Kraft getr. am 16.5.2001) Artikel 1 Gesetz über Rahmenbedingungen für elektronische Signaturen (Signaturgesetz - SigG)
- [7] Verordnung zur elektronischen Signatur (Signaturverordnung - SigV) (in Kraft getreten am 16.11.2001)
- [8] Bekanntmachung zur digitalen Signatur nach Signaturgesetz und Signaturverordnung vom 09.02.98, Bundesanzeiger Nr. 31 vom 14.02.98
- [9] Spezifikation der Schnittstelle zu Chipkarten mit Digitaler Signatur-Anwendung/Funktion nach SigG und SigV; DIN 66291-1, Version 1.0, 15<sup>th</sup> December 1998
- [10] International Organization for Standardization: Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 2: Dimensions and location of contacts, International Standard ISO/IEC 7816-2 (1996)
- [11] International Organization for Standardization: Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 3: Electronic signals and transmission protocols, International Standard ISO/IEC 7816-3 (1997)
- [12] International Organization for Standardization: Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 4: Interindustry commands for interchange, International Standard ISO/IEC 7816-4 (1995)
- [13] International Organization for Standardization: Information technology – Identification cards – Integrated circuit(s) cards with contacts – Part 8: Security related interindustry commands, International Standard ISO/IEC 7816-8 FDIS (1998)
- [14] Certification report for Smart Card IC (Security Controller) SLE66CX322P with RSA2048 / m1484a23 from Infineon Technologies AG, certification file BSI-DSZ-CC-0169-2002, BSI, 07.05.2002

## Security Target

Ende der Sicherheitsvorgaben zu  
„CardOS/M4.01A mit Applikation für digitale Signatur“.



**Zertifizierungsreport**  
**T-Systems-DSZ-ITSEC-04084-2002**  
**© T-Systems ISS GmbH, 2002**

**Adresse:** Rabinstr.8, 53111 Bonn  
**Telefon:** 0228/9841-0  
**Fax:** 0228/9841-60  
**Web:** [www.t-systems-iss.com](http://www.t-systems-iss.com)  
[www.t-systems-zert.com](http://www.t-systems-zert.com)

**T** . . . Systems . . .